TABLE OF CONTENTS:

PG. 2	PRODUCT NAMES
PG. 3	PRODUCT DELIVERY TIME
PG. 4	F.LLI RAMACCIONI GENERAL TERMS OF SALE
PGS. 5-16	PURCHASE ORDER FORMS
PG. 17	CT 70 SPECIFICATIONS
PG. 18	CT 70 MEASUREMENTS AND DIMENSION DRAWINGS OF FRAMES
PGS. 19-20	CT 70 SIZE LIMITS
PG. 21	CT 70 AND LIVING 82 OPENING DIRECTIONS
PGS. 22-27	CT 70 DIMENSION DRAWINGS OF JOINTS
PG. 28	CT 70 WINDOWPANE COMBINATIONS
PGS. 29-30	CT 70 COMPLEMENTARY PROFILES
PG. 31	LIVING 82 SPECIFICATIONS
PGS. 32-33	LIVING 82 SIZE LIMITS
PGS. 34-37	LIVING 82 DIMENSION DRAWINGS OF JOINTS
PG. 38	LIVING 82 WINDOWPANE COMBINATIONS
PGS. 39-40	LIVING 82 COMPLEMENTARY PROFILES
PG. 41	CT 70 AND LIVING 82 FRENCH DOOR- FRAME COMBINATIONS AND SIZE LIMITS
PGS. 42-43	FRENCH DOOR ACCESSORIES WITH PHOTOGRAPHS
PG. 44	PSK SLIDING DOOR SYSTEM OVERALL DIMENSIONS
PG. 45	PSK SLIDING DOOR OPENING DIRECTIONS
PGS. 46-47	PSK SLIDING DOOR COMBINATIONS
PGS. 48-49	S 74 SLIDING WINDOW
PG. 50	S74 WINDOWPANE COMBINATIONS
PGS. 51-52	EASY SLIDE SLIDING DOOR
PGS. 53-54	S 150 SLIDING DOOR
PG. 55	S 150 EASY SLIDE WINDOWPANE COMBINATIONS
PG. 56	LIVING SLIDE 82 SLIDING DOOR
PG. 57	LIVING SLIDE 82 WINDOWPANE COMBINATIONS
PG. 58	PVC ROLLER SHUTTER BOX
PGS. 59-60	PVC ROLLER SHUTTER SYSTEM

RAMACCIONI serramenti dal 1963 | Partner PVC SCHÜCO

PRODUCT DELIVERY TIME:

Standard products	3-4 weeks (average)
Products not included in category 1: Sliding or with special coating	5/6 weeks (average)
Products not included in category 2: Out-of-square, with arcades, with special accessories, with special coating, with roller shutter, etc.	8/9 weeks (average)

News

F.lli Ramaccioni may process express orders in 8/10 calendar days at a 10% surcharge and only upon confirmation of the feasibility by our technical office.

The above times are considered from the order confirmation including executive measurements, and are not binding

PACKAGING:

Standard

Delivery specifications:

F.lli Ramaccioni will apply the cost of delivery upon order confirmation, and it is implied that the goods shall be delivered at your premises. For delivery at different destinations, the additional cost will be estimated on an order-by-order basis.

F.LLI RAMACCIONI GENERAL TERMS OF SALE

1) The signature of the order confirmation implies the acceptance of the same under all the technical and commercial aspects outlined.

2) Orders shall be accepted if and only if made using the order forms provided by F.lli Ramaccioni or sent directly through the POL online platform.

3) In case of eventual order confirmation changes, F.lli Ramaccioni will apply a one-time cost of 25.00 euros + VAT.

4) The delivery times on the order confirmation are considered strictly approximate and non-binding. The customer will in no case have the right to refuse the goods, request an agreement termination, or request damage compensation for an eventual delay in the delivery.

5) F.lli Ramaccioni hereby commits to shipping the goods as soon as they are ready, by its own means or through the use of a shipping company. In case of eventual delays in the service requested by the customer, a warehouse storage cost of 5%/week calculated on the basis of the total amount of the order shall be applied, and the manufacturing company shall be waivered from any liability should the goods suffer damage throughout their displacement.

6) The goods will travel at the risk and hazard of the customer. Should the goods be shipped by means of a shipping company, eventual noncompliance claims shall be reported upon pick-up by the same, and resolved directly with the courier. Any eventual new manufacturing of noncompliant goods shall be charged to the customer; the new operation requires a new order and a standard order confirmation.

7) Retention of ownership

   All the material included in the order and delivered to the customer through a payment by instalments of whichever nature shall remain a property of F.lli Ramaccioni, which has the right to reclaim the goods wherever they may be - waiver of articles 935 and 937 of the Italian Civil Code. It is thus forbidden to resell or transfer the goods before payment is complete.

8) In case of a delayed payment, F.lli Ramaccioni reserves the right to apply moratory interest in accordance with current law, and may suspend all ongoing orders and request damage compensation for the same,


9) F.lli Ramaccioni avails itself of the right to mark down the invoices issued through banking institutions, and the customer has the obligation to confirm acceptance should the same be requested by the institutions.

10) Any dispute related to this agreement shall be governed exclusively by the Court of Competent Jurisdiction in Macerata or by the Small Claims Court judge of Macerata.


OPENING DIRECTION SPECIFICATIONS

THE POSITION OF THE DOOR WITH THE HANDLE MUST BE SPECIFIED.


VIEW IN PULL DIRECTION




RIGHT-SIDE OPENING




LEFT-SIDE OPENING

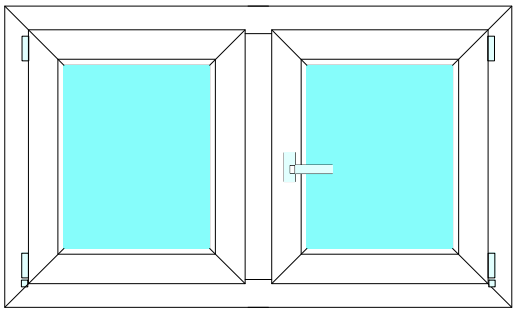

RIGHT-SIDE OPENING

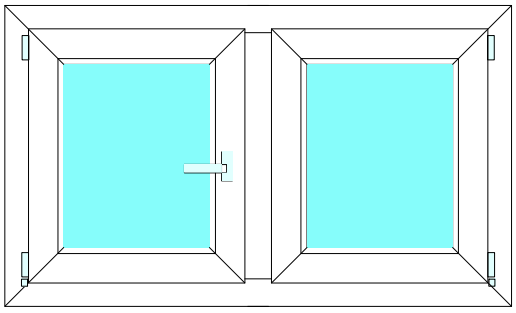

LEFT-SIDE OPENING

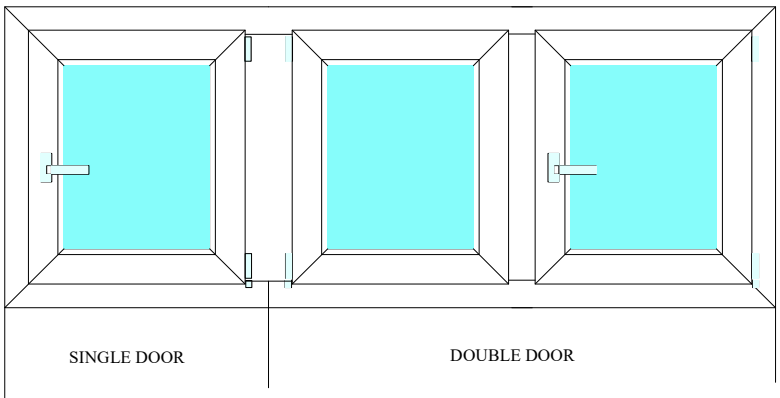

ELEMENT AT THE CENTRE OF THE FRAME

NON-STANDARD STRUCTURE

3 DOORS (DOUBLE DOOR + SINGLE DOOR)

VARIOUS COMBINATIONS POSSIBLE


ORDERS WITH DETAIL DRAWING PROVIDED ARE ACCEPTED.

SPECIFY HANDLE POSITION

SPECIFY SINGLE DOOR POSITION

SPECIFY DOUBLE DOOR POSITION

SIZE LIMITS FOR CT 70 CASEMENT WINDOWS



INTERVAL	
L min 400	L max 900
H min 480	H max 1400


INTERVAL	
L min 400	L max 700
H min 480	H max 2300


MAX WEIGHT (frame + windowpane): 60 kg
eg. 3+3 - swisspacer - 4+4 (35 kg/m2)


HARDWARE AVAILABLE:
SYMMETRICAL PIVOT HINGE
CONCEALED PIVOT HINGE MAX AP 90°
SCHÜCO SYMMETRICAL HINGE
SCHÜCO CONCEALED HINGE MAX AP 90°


CT 70 POSSIBLE COMBINATIONS

FRAME



L 68



Z 30



Z 38



Z 50


DOOR


M oversize


L clearance


S standard


R round



INTERVAL	
L min 400	L max 1200
H min 480	H max 1600


INTERVAL	
L min 400	L max 800
H min 480	H max 2400


MAX WEIGHT (frame + windowpane): 80 kg
e.g.3+3-4+4 swisspacer (35 kg/m2)


HARDWARE AVAILABLE:
SYMMETRICAL PIVOT HINGE
CONCEALED PIVOT HINGE MAX AP 90°
SCHÜCO SYMMETRICAL HINGE
SCHÜCO CONCEALED HINGE MAX AP 90°


CT 70 POSSIBLE COMBINATIONS

FRAME



L 68



Z 30



Z 38



Z 50

DOOR


M oversize


S standard


R round




INTERVAL	
L min 400	L max 1000
H min 480	H max 2500


MAX WEIGHT (frame + windowpane): 100 kg
e.g. 3+3-4+4 swisspacer (35 kg/m2)


HARDWARE AVAILABLE:
SYMMETRICAL PIVOT HINGE
CONCEALED PIVOT HINGE MAX AP 90°
SCHÜCO SYMMETRICAL HINGE
SCHÜCO CONCEALED HINGE MAX AP 90°


CT 70 POSSIBLE COMBINATIONS

FRAME



L 68



Z 30


Z 38


Z 50

DOOR


M oversize



INTERVAL	
L min 400	L max 1200
H min 480	H max 2650

MAX WEIGHT (frame + windowpane): 150 kg
e.g. 3+3-4+4 swisspacer (40 kg/m2)


HARDWARE AVAILABLE:


CONCEALED PIVOT HINGE MAX AP 90°


SCHÜCO CONCEALED HINGE MAX AP 90°


CT 70 POSSIBLE COMBINATIONS

FRAME



L 68


Z 30


Z 38



Z 50

DOOR



M oversize

METHOD OF DIMENSION MEASUREMENT:

FRAME WITHOUT JAMB EXTENSION:
OUTSIDE OF CHAMBER




FRAME WITH JAMB EXTENSION: OUTSIDE OF CHAMBER




SPECIFICATIONS FOR JAMB EXTENSION TRIM:

THE REMAINING DIMENSION OF THE JAMB EXTENSION MUST BE SPECIFIED

EXAMPLE




JAMB EXTENSION 0 mm




JAMB EXTENSION 20 mm


CT 70 FRAME DIMENSION DRAWINGS




L 68
cod 18865



Z 30
cod 19021




Z 38
cod 18899




Z 50
cod 19703


LIVING 82 FRAME DIMENSION DRAWINGS




L 70 MD
cod 19411




L 70 AS
cod 19412




Z 50 MD
cod 19415




Z 50 AS
cod 19425




CT 70
soglia




LIVING 82
soglia

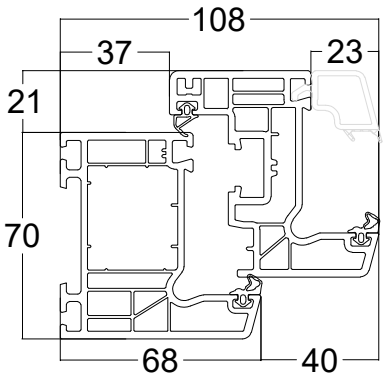


CT 70
joint with clearance

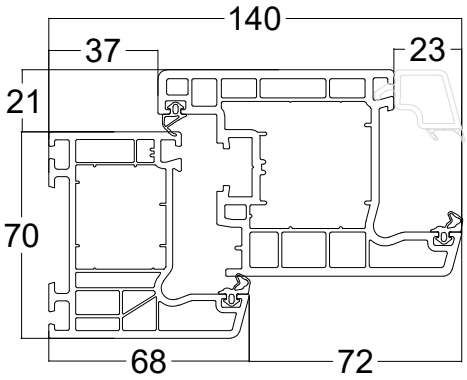


CT 70
oversize joint - inward opening

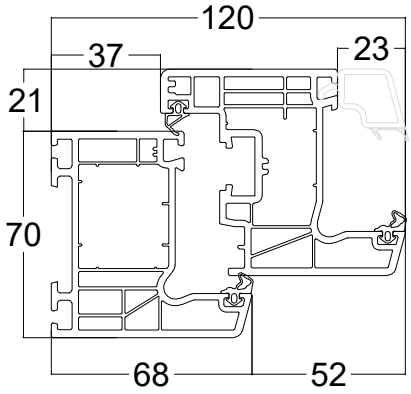


CT 70
standard joint

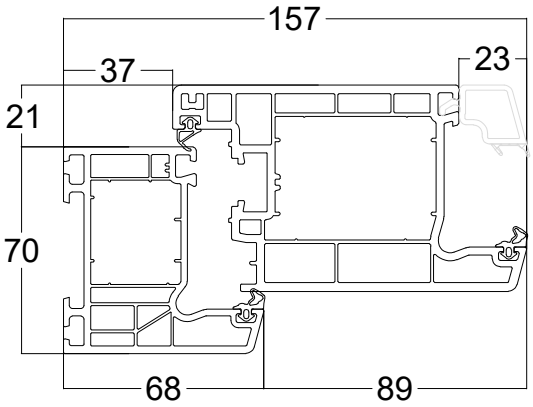


CT 70
French door joint - inward opening

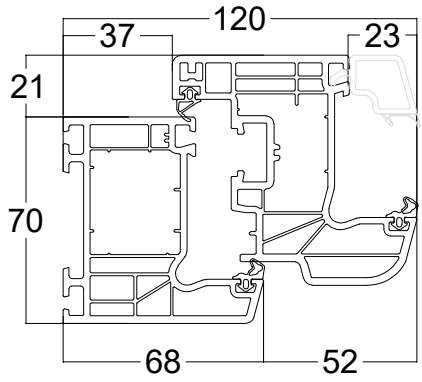


CT 70
round joint

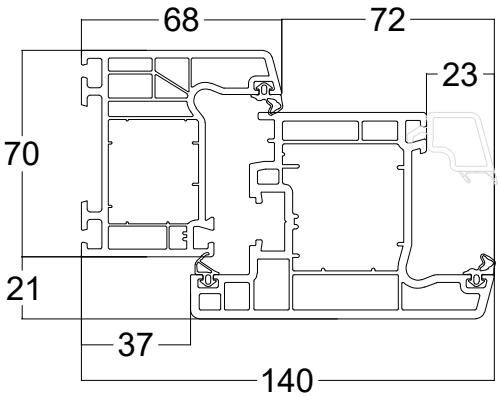


CT 70
oversize joint - outward opening

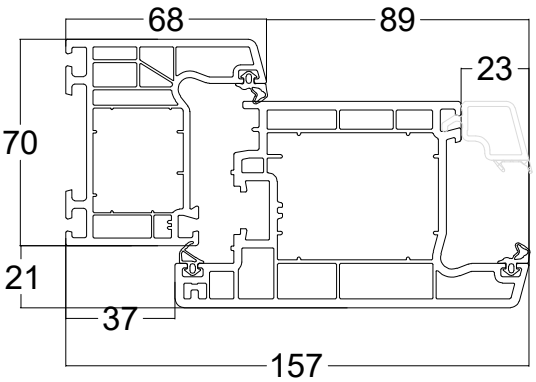


CT 70
French door joint - outward opening

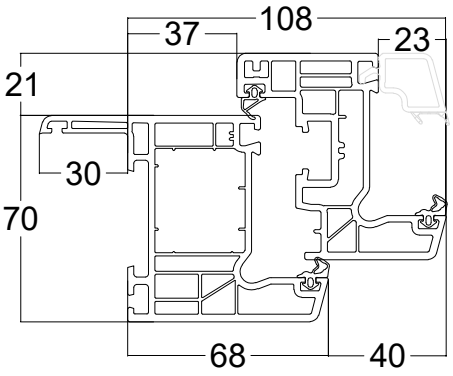


CT 70
joint with clearance

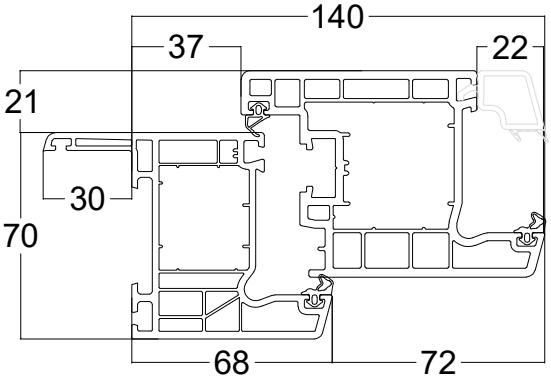


CT 70
oversize joint - inward opening

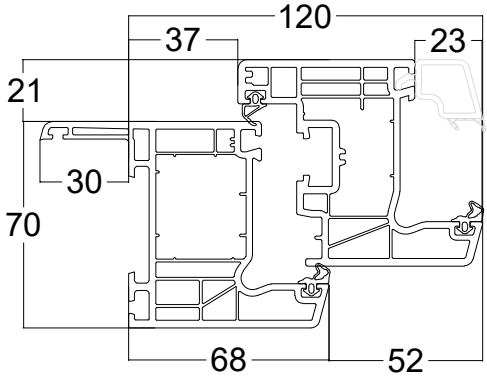


CT 70
standard joint

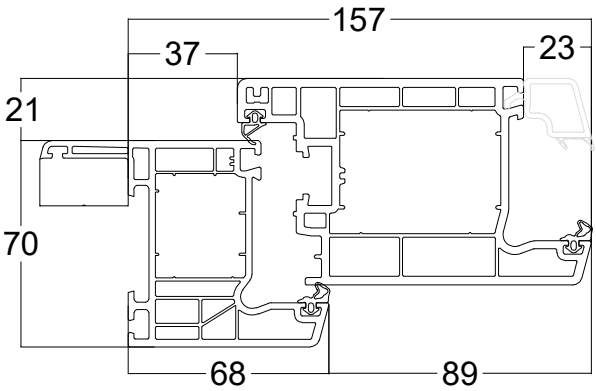


CT 70
French door joint - inward opening

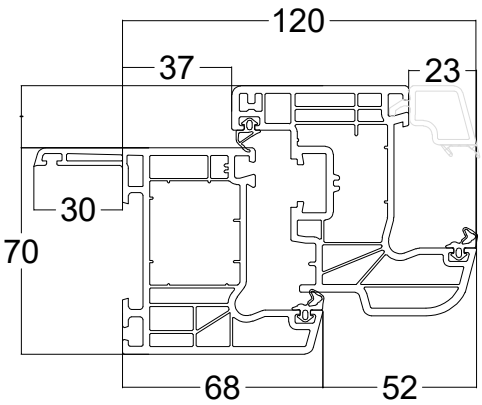


CT 70
round joint

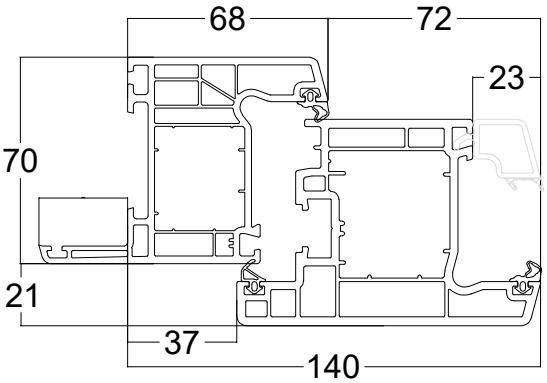


CT 70
oversize joint - outward opening

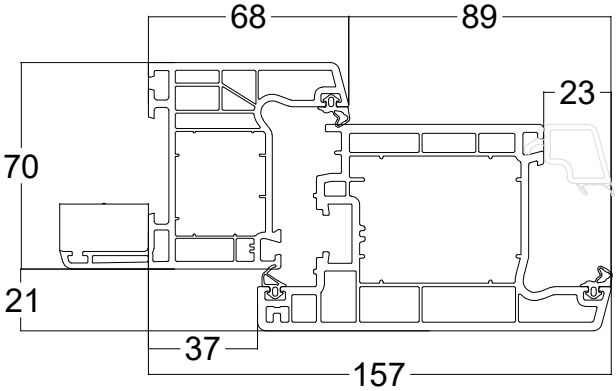


CT 70
French door joint - outward opening

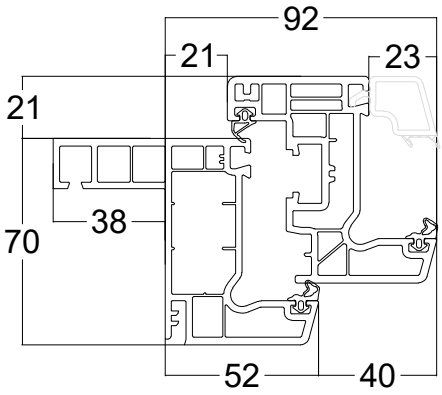


CT 70
joint with clearance

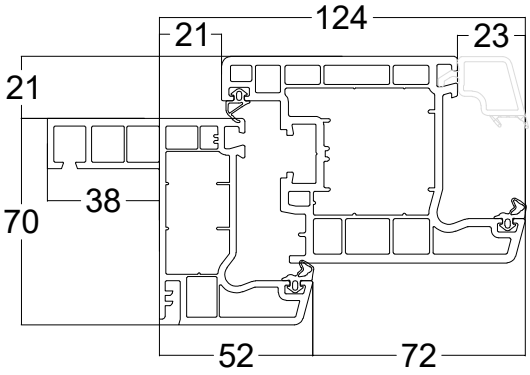


CT 70
oversize joint - inward opening

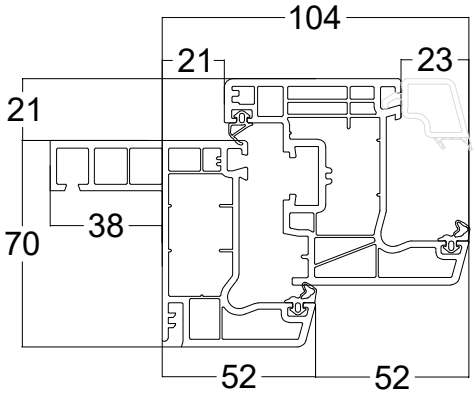


CT 70
standard joint

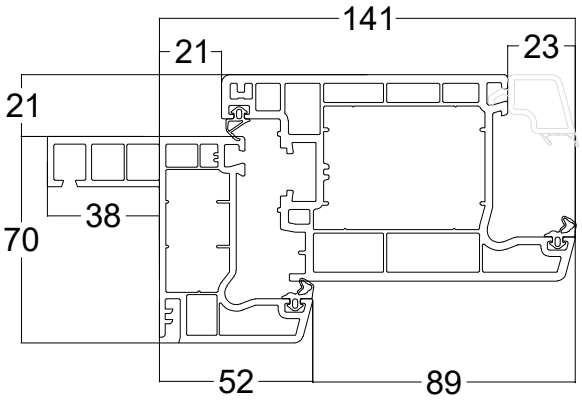


CT 70
French door joint - inward opening

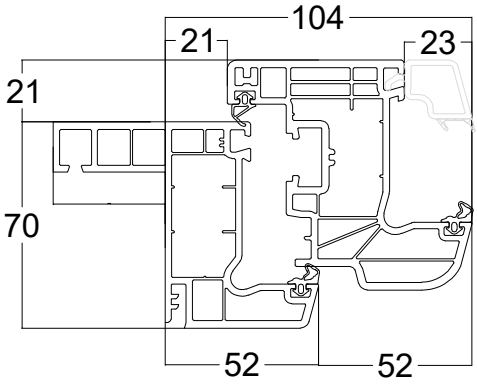


CT 70
round joint

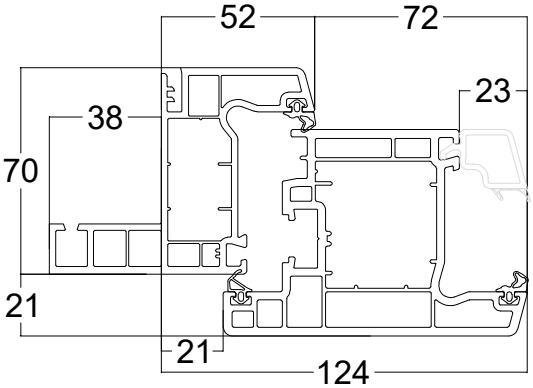


CT 70
oversize joint - outward opening

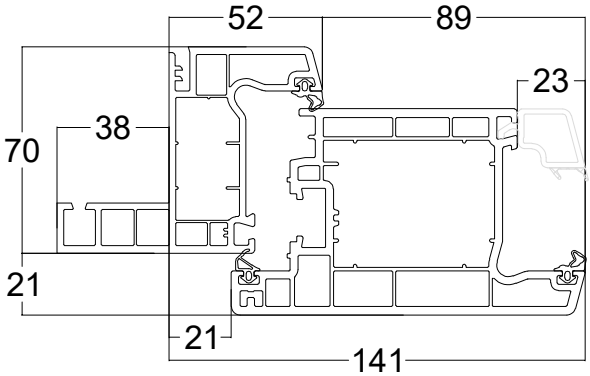


CT 70
French door joint - outward opening

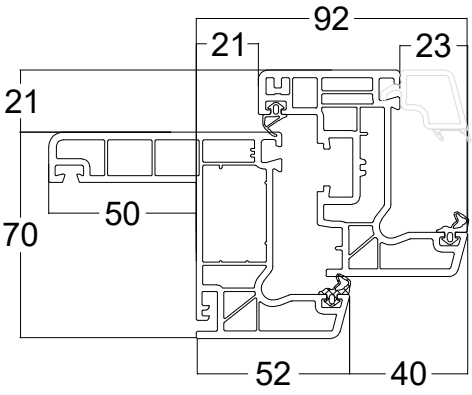


CT 70
joint with clearance

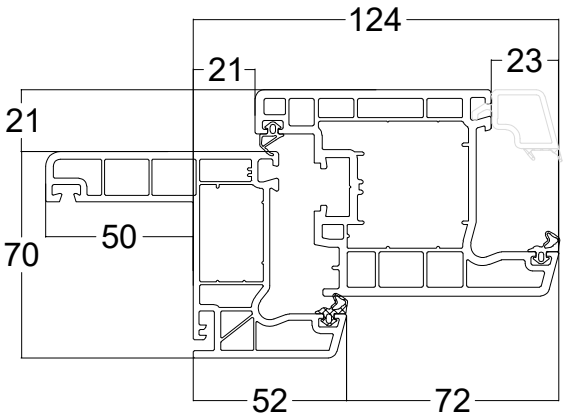


CT 70
oversize joint - inward opening

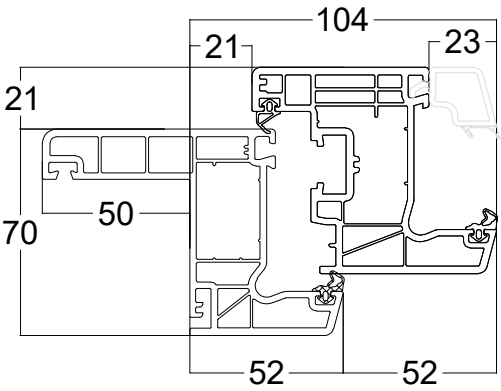


CT 70
standard joint

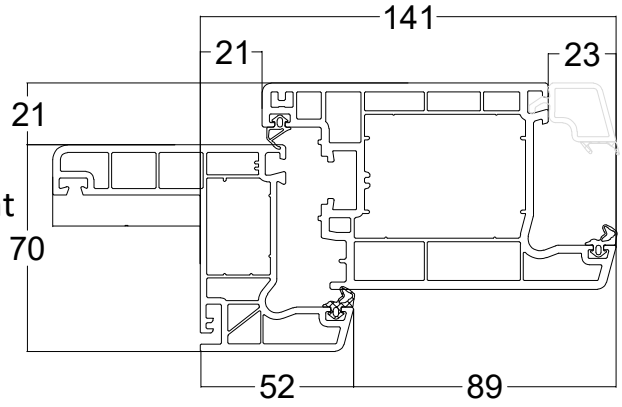


CT 70
French door joint - inward opening

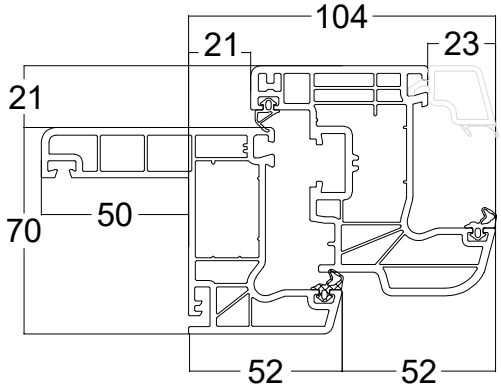

CT 70
round joint

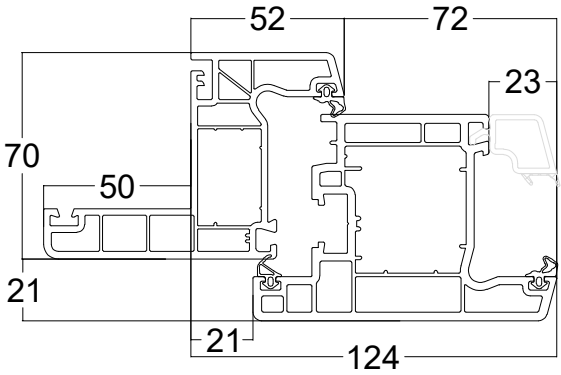


CT 70
oversize joint - outward opening

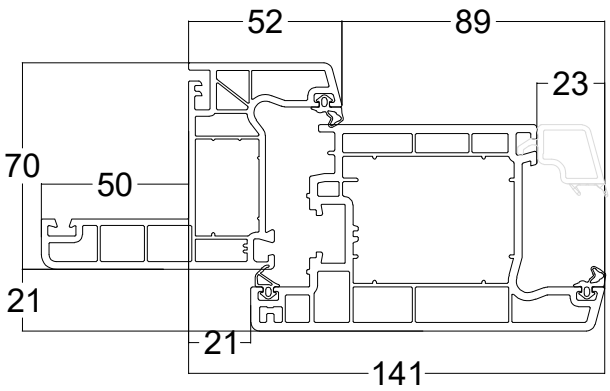



CT 70
French door joint - outward opening

DOOR CLEARANCE

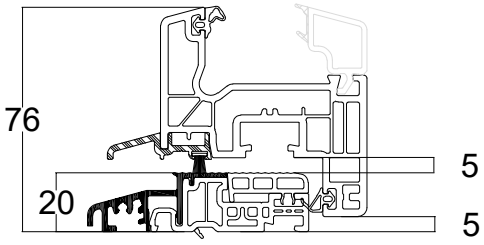


STANDARD DOOR

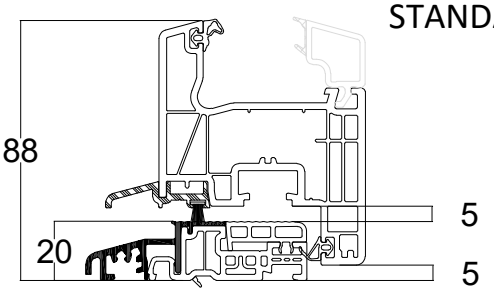


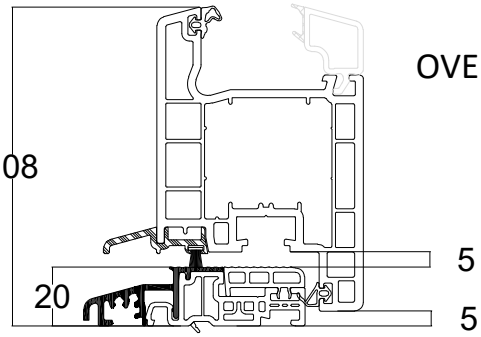


OVERSIZE DOOR

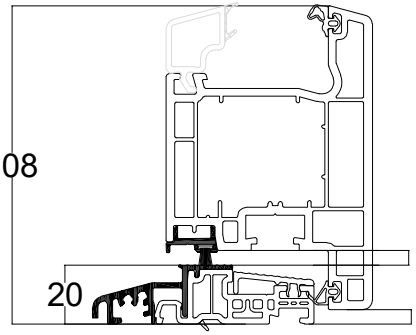


OVERSIZE DOOR - OUTWARD OPENING

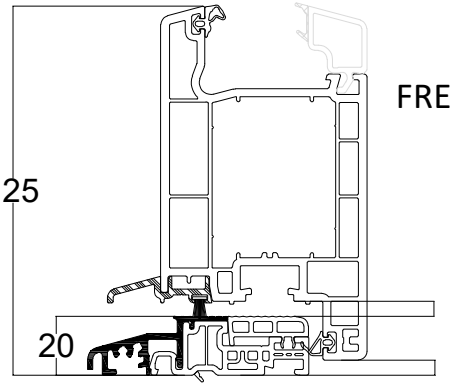


FRENCH DOOR

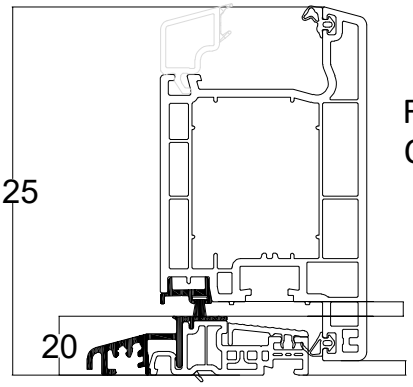


FRENCH DOOR - OUTWARD OPENING

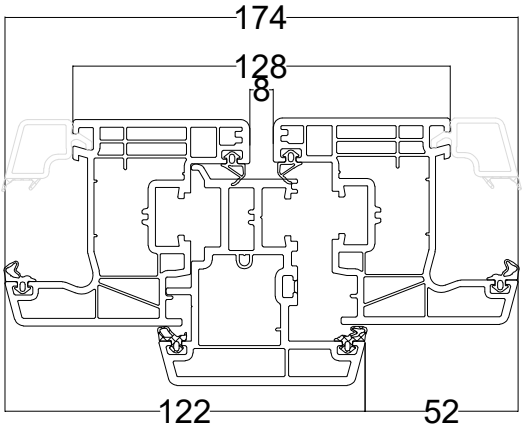


CT 70
standard joint

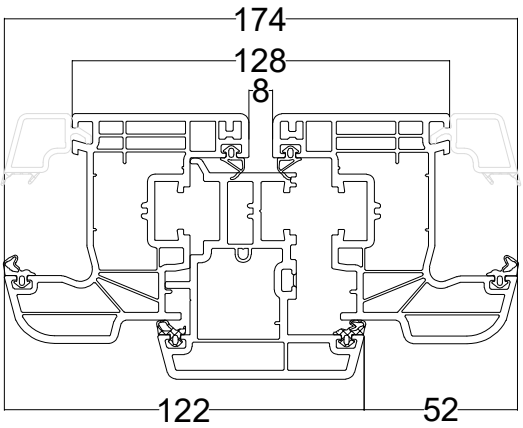


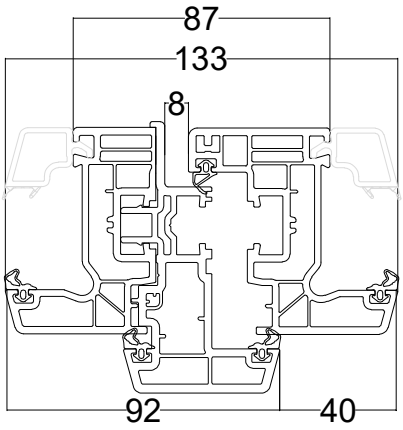


CT 70 joint with clearance

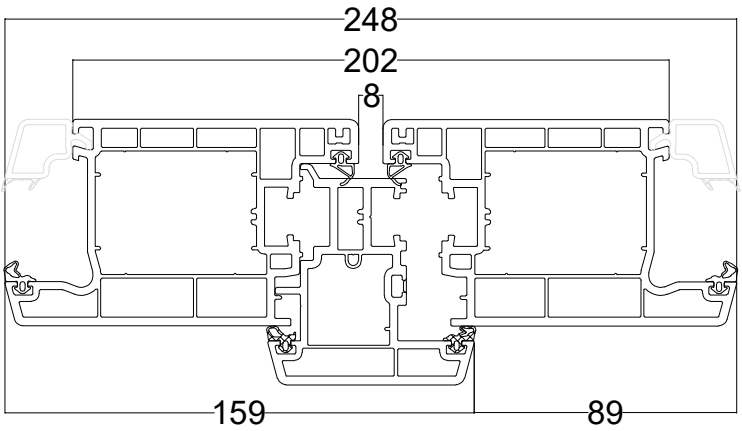


CT 70 French door joint - inward opening

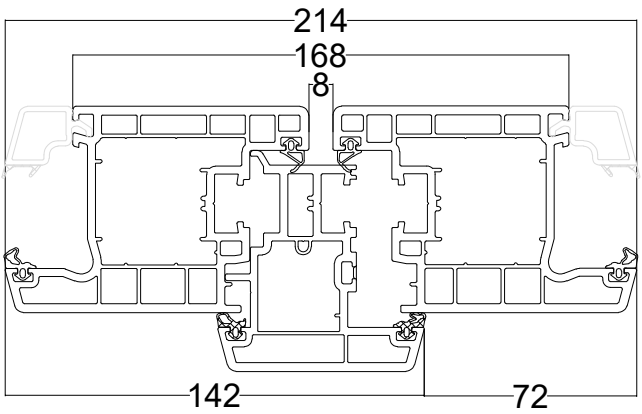

CT 70 oversize joint - inward opening

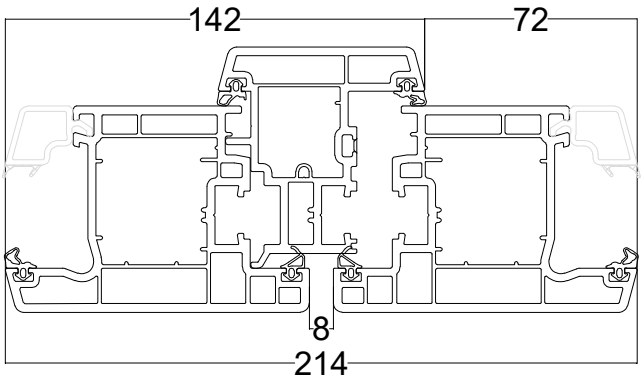


CT 70 oversize joint - outward opening

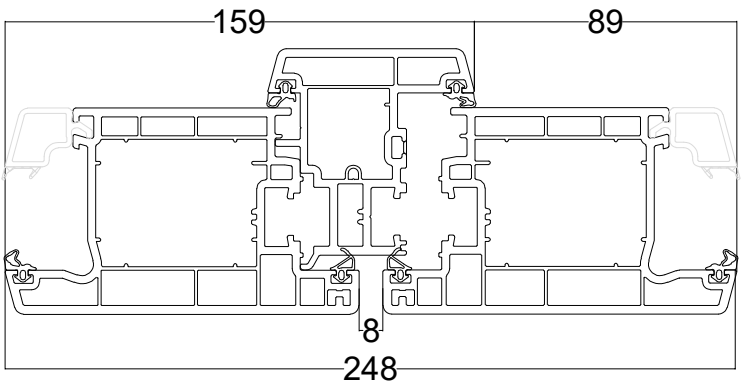


CT 70 French door joint - outward opening

19693

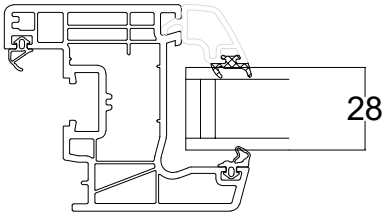


IN STOCK

19673

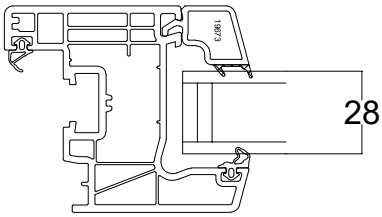


IN STOCK


19675

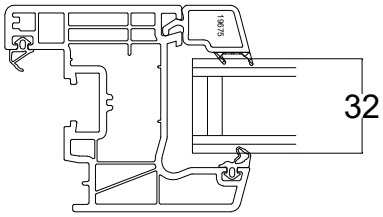


19677

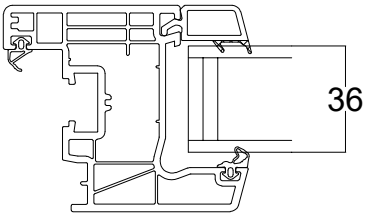


19679

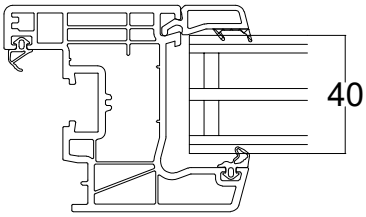


19661

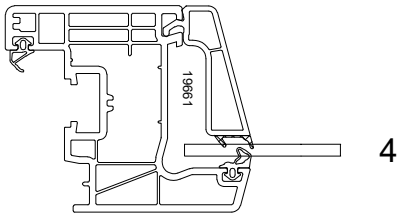


19683

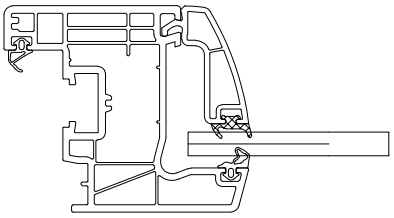

19667

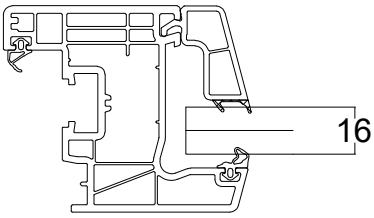



19669




IN STOCK

19671

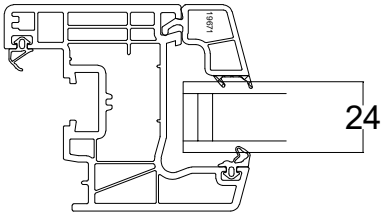


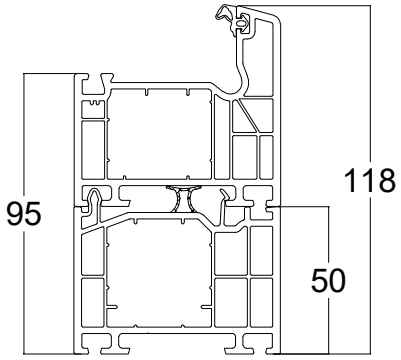


19842
50-mm
STRETCHER

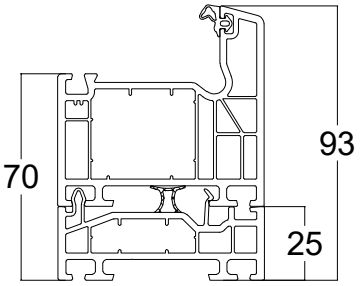


19841
25-mm
STRETCHER

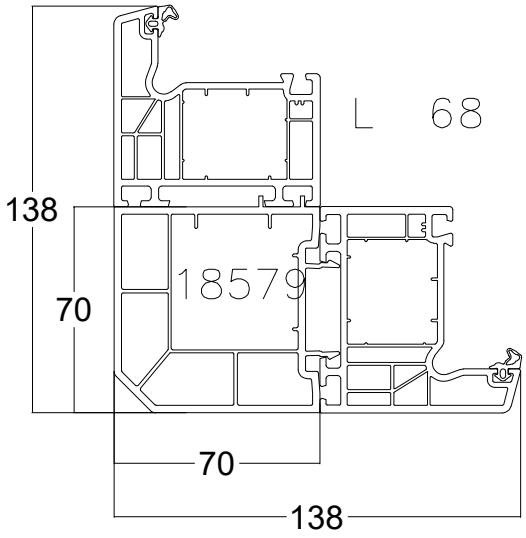


90° ANGLE JOINT - 70 mm

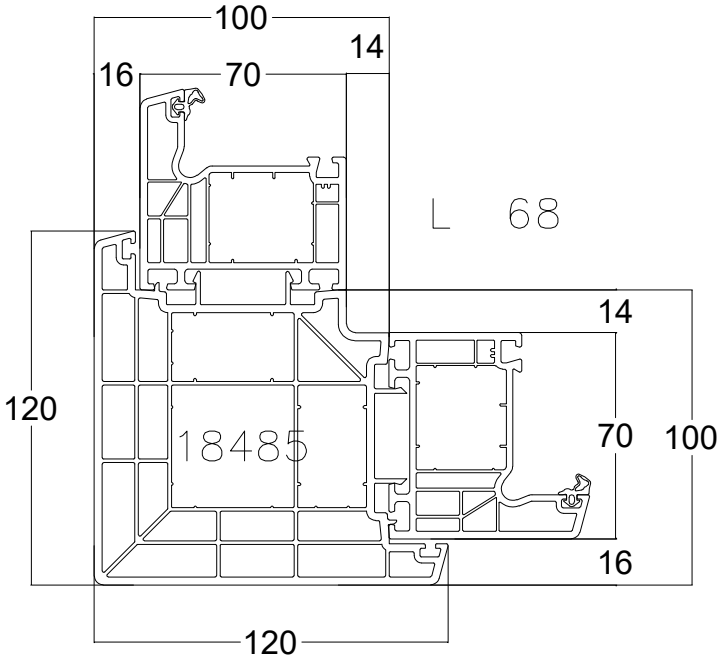


90° ANGLE JOINT - 120 mm

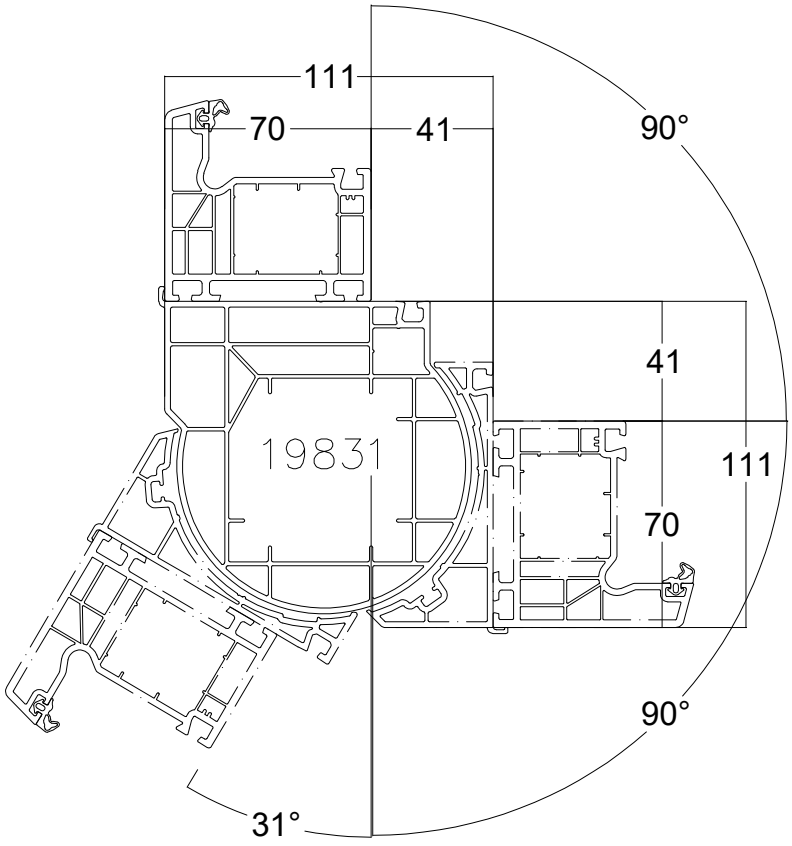


ADJUSTABLE ANGLE JOINT
MINIMUM ANGLE 90°
MAXIMUM ANGLE 211°

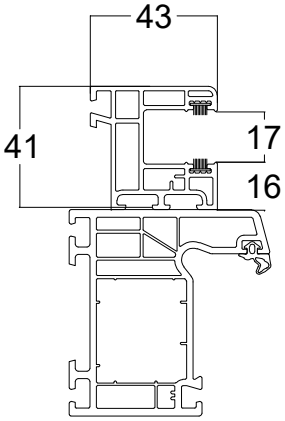

FIXED PVC GUIDE

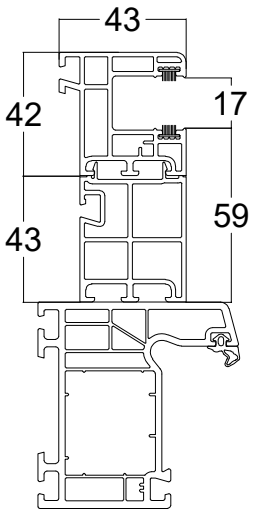


FIXED PVC GUIDE WITH STRETCHER

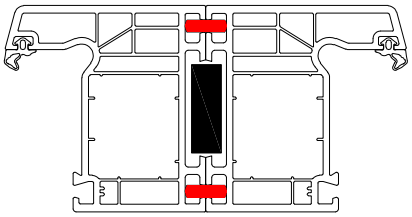


COUPLING SLAT WITH SOLID STEEL REINFORCEMENT COLUMN


PVC SLATS

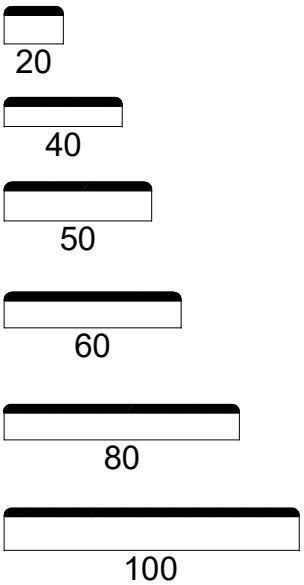



BOX-SECTION

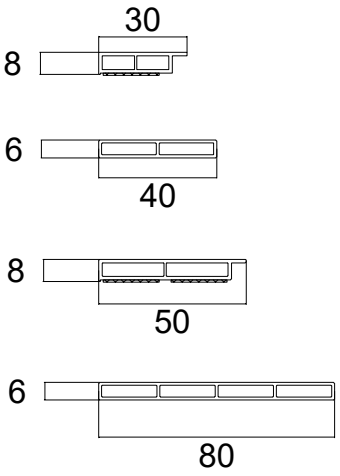



ANGULAR














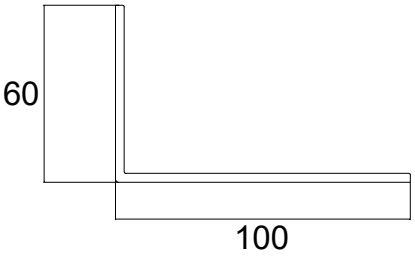



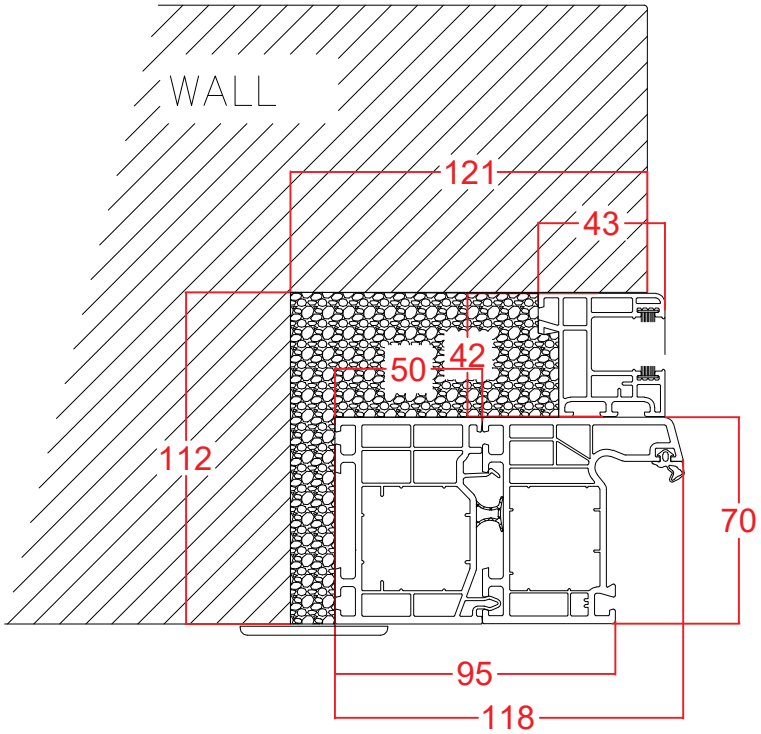
WALL
121
43
42
50
112
70
95
118

Schüco LivIng MD



By replacing old windows with new Schüco Living windows, you may greatly reduce your current energy consumption. A lower consumption means lower CO2 emissions. This will save heating costs, energy, and at the same time contribute to protecting the environment.


The excellent thermal insulation properties make Schüco Living a true guarantee of well-being, because the inner temperature of the frame never falls below that of the home environment, even in the coolest locations. This allows an efficient prevention of draught and condensation. Moreover, there is no heat loss through the windowpanes. Oppositely. The windows favour the entrance of heat from sunrays.

Energy saving with Schüco Living windows is crystal clear:

- Customized coating options
- Insulating and functional glass – 24 mm to 52 mm 1
- 7-chamber profile with excellent insulation properties: U-value up to 1.0 W/(m2K) and 0.96 W/(m2K) 2
- Two 3 or three 4 seal levels offer an excellent wind, rain, and sound protection
- Visible portion reduced to allow maximum natural light entrance and solar energy accumulation 5
- The classic geometry of the door, with its essential design and timeless line, complies with the demands of modern architecture 6

Technical data	Schüco LivIng 82 MD
Dimensions	
Width of frame base	82 mm
Width of door base	82 mm
Windowpane options	24 mm - 52 mm
Tests and standard	
Thermal insulation in accordance with DIN EN 12412-2*	U_f = 0,96 W/(m²K)
Sound insulation in accordance with DIN EN ISO 140-3 (max)*	$R_{w,p}$ = 47 dB
Burglar resistance in accordance with DIN EN 1627	RC 2
Air permeability in accordance with DIN EN 12207 (class)	4
Watertightness in accordance with DIN EN 12208 (class)	9A

* depending on the profile and type of glass



INTERVAL	
L min 400	L max 900
H min 480	H max 1400


INTERVAL	
L min 400	L max 700
H min 480	H max 2300


MAX WEIGHT (frame + windowpane): 60 kg
eg. 3+3 - swisspacer - 4+4 (35 kg/m2)


HARDWARE AVAILABLE:
SYMMETRICAL PIVOT HINGE
CONCEALED PIVOT HINGE MAX AP 90°
SCHÜCO SYMMETRICAL HINGE
SCHÜCO CONCEALED HINGE MAX AP 90°


LIVING 82 POSSIBLE COMBINATIONS

FRAME



L 70 MD



L 70 AS



Z 50 MD



Z 50 AS

DOOR


M oversize


L clearance


S standard



INTERVAL	
L min 400	L max 1200
H min 480	H max 1600


INTERVAL	
L min 400	L max 800
H min 480	H max 2400


MAX WEIGHT (frame + windowpane): 80 kg
eg. 3+3 - swisspacer - 4+4 (35 kg/m2)


HARDWARE AVAILABLE:
SYMMETRICAL PIVOT HINGE
CONCEALED PIVOT HINGE MAX AP 90°
SCHÜCO SYMMETRICAL HINGE
SCHÜCO CONCEALED HINGE MAX AP 90°


LIVING 82 POSSIBLE COMBINATIONS

FRAME



L 70 MD



L 70 AS



Z 50 MD


Z 50 AS

DOOR


M oversize


S standard




INTERVAL	
L min 400	L max 1000
H min 480	H max 2500


MAX WEIGHT (frame + windowpane): 100 kg
eg. 3+3 - swisspacer - 4+4 (35 kg/m2)


HARDWARE AVAILABLE:
SYMMETRICAL PIVOT HINGE
CONCEALED PIVOT HINGE MAX AP 90°
SCHÜCO SYMMETRICAL HINGE
SCHÜCO CONCEALED HINGE MAX AP 90°


LIVING 82 POSSIBLE COMBINATIONS

FRAME



L 70 MD



L 70 AS


Z 50 MD


Z 50 AS

DOOR


M oversize



INTERVAL	
L min 400	L max 1200
H min 480	H max 2650

MAX WEIGHT (frame + windowpane): 150 kg
eg. 4+4 - swisspacer - 4+4 (40 kg/m2)


HARDWARE AVAILABLE:


CONCEALED PIVOT HINGE MAX AP 90°


SCHÜCO CONCEALED HINGE MAX AP 90°


LIVING 82 POSSIBLE COMBINATIONS

FRAME



L 70 MD



L 70 AS


Z 50 MD



Z 50 AS

DOOR



M oversize

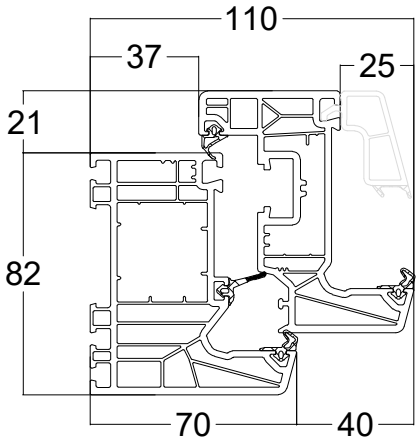


LIVING 82
slim joint

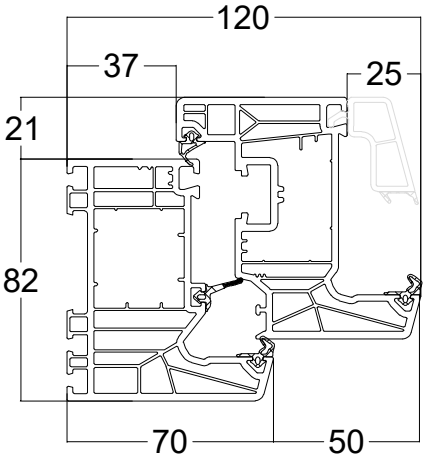


LIVING 82
standard joint

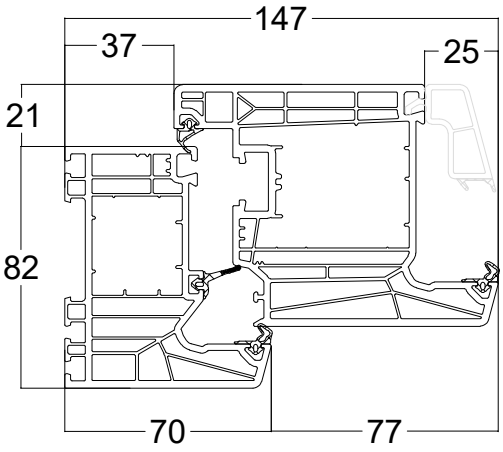


LIVING 82
oversize joint -
inward opening

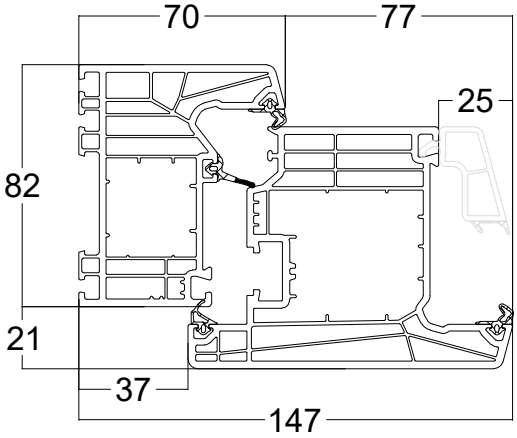


LIVING 82
oversize joint -
outward opening

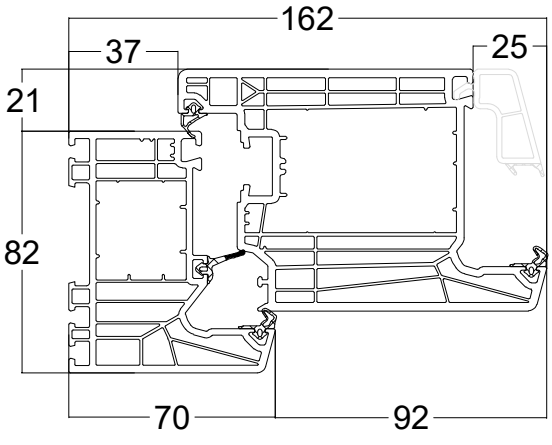


LIVING 82
French door joint -
inward opening

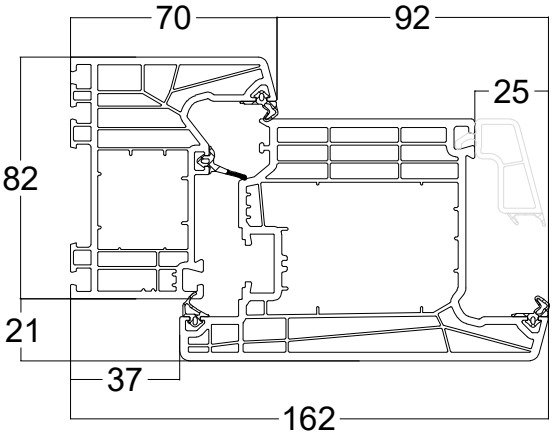


LIVING 82
French door joint -
outward opening

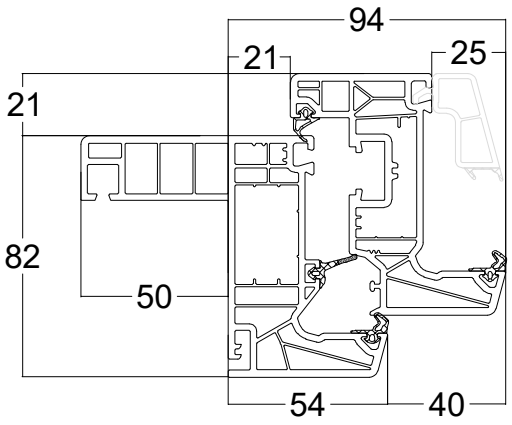


LIVING 82
slim joint

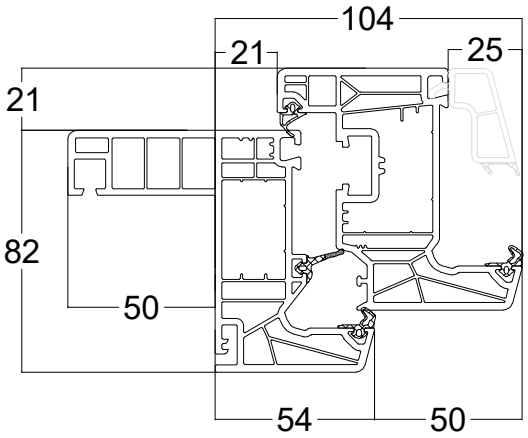


LIVING 82
standard joint

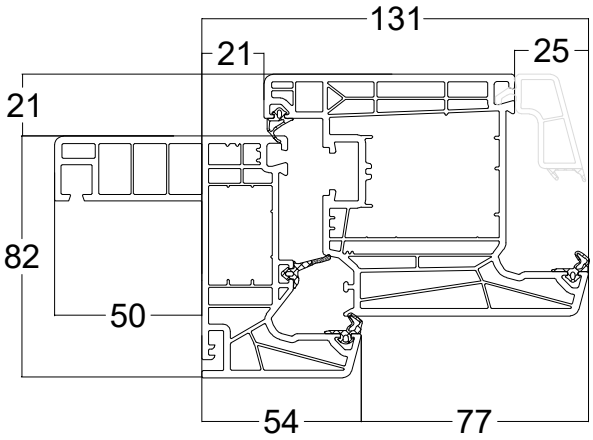


LIVING 82
oversize joint -
inward opening

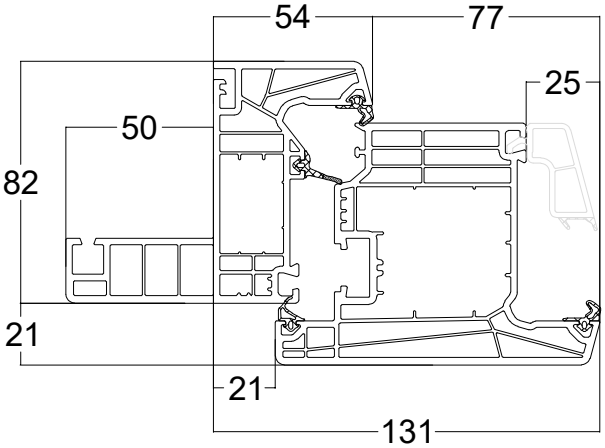

LIVING 82
oversize joint -
outward opening

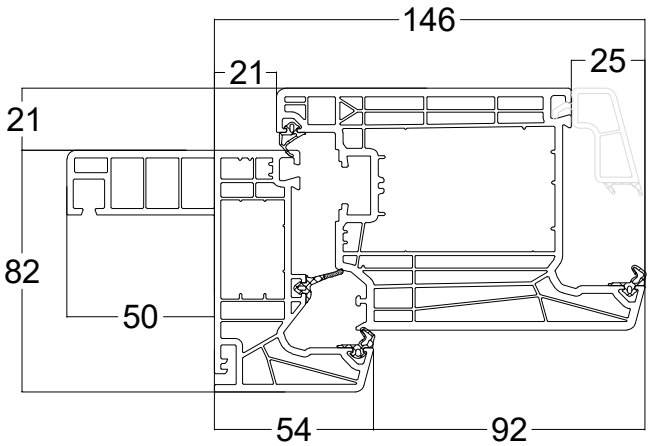


LIVING 82
French door joint -
inward opening

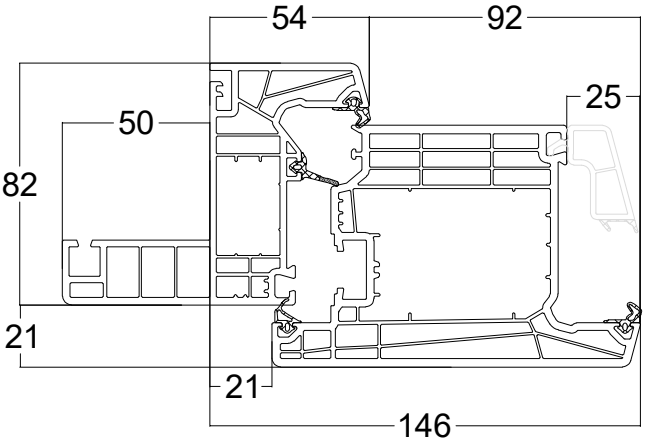


LIVING 82
French door joint -
outward opening


SLIM DOOR

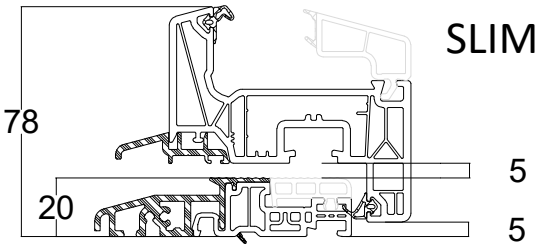


STANDARD DOOR

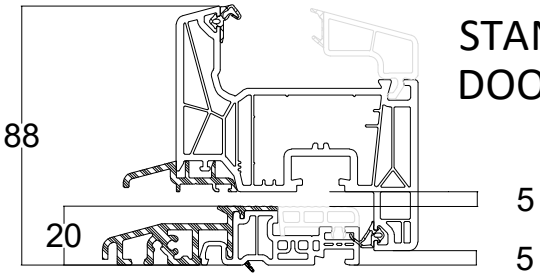


OVERSIZE DOOR

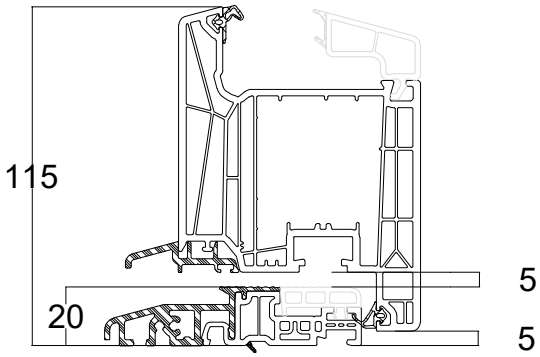


FRENCH DOOR

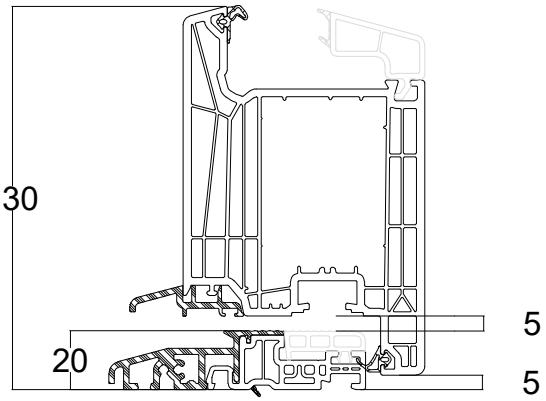


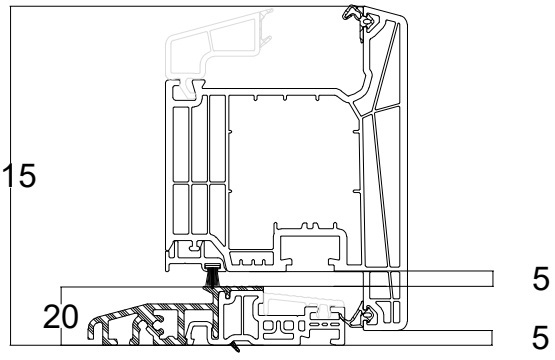


OVERSIZE DOOR - OUTWARD OPENING

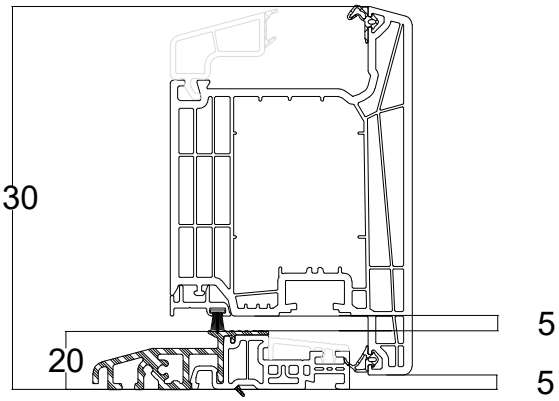


FRENCH DOOR - OUTWARD OPENING

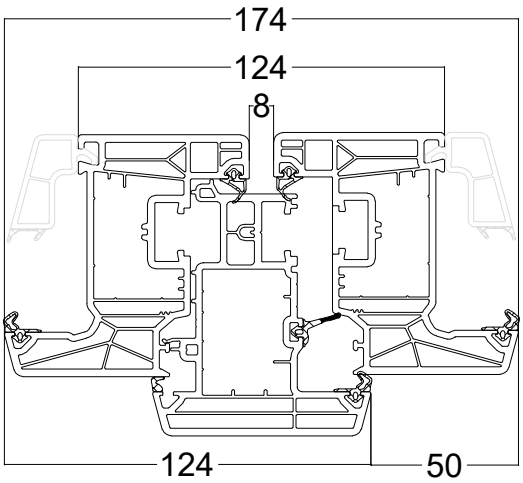


LIVING 82 standard joint

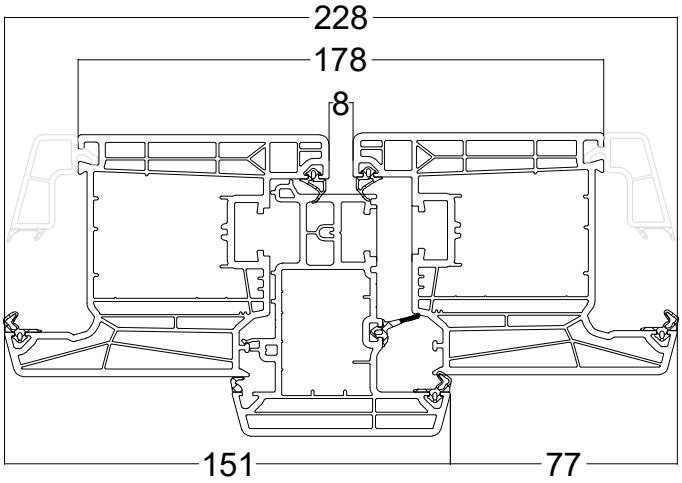


LIVING 82 oversize joint - inward opening

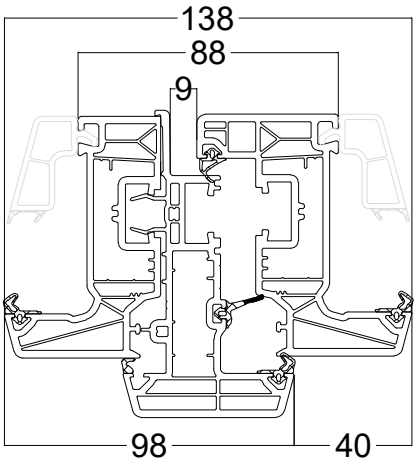


LIVING 82 slim joint

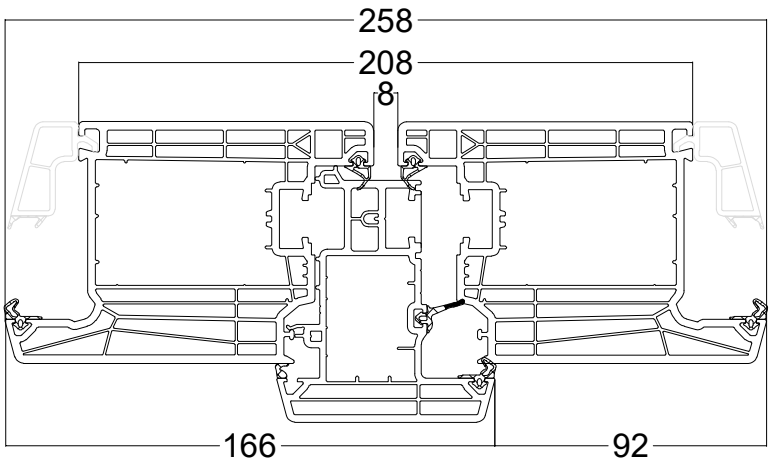

LIVING 82 French door joint - inward opening

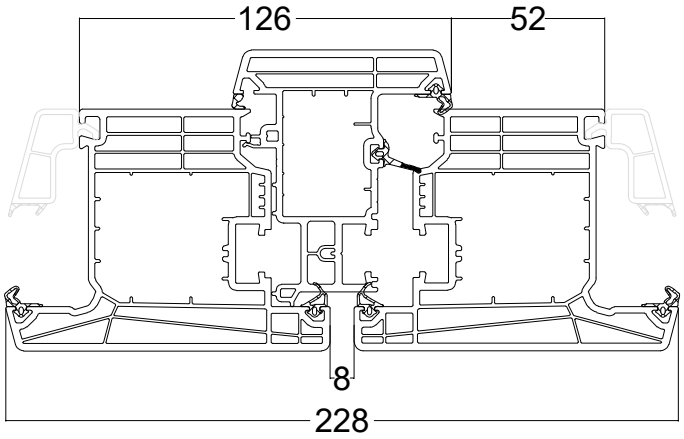


LIVING 82 oversize joint - outward opening

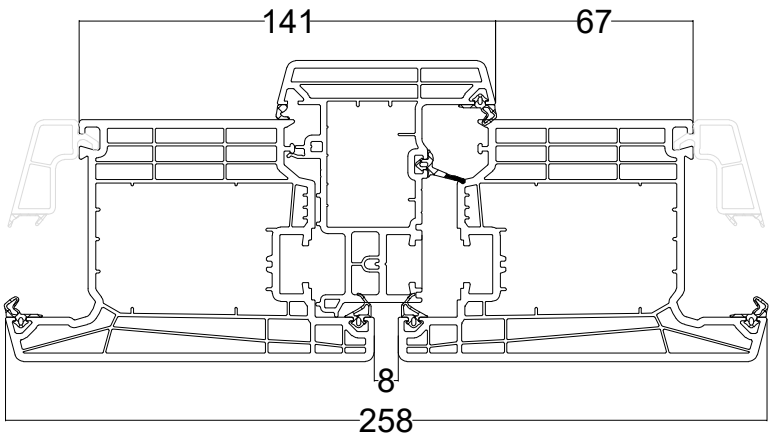


LIVING 82 French door joint - outward opening

19667

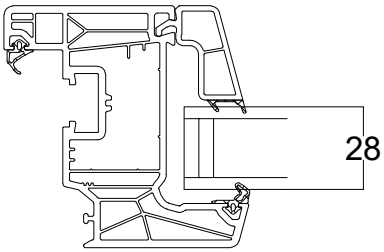


19669

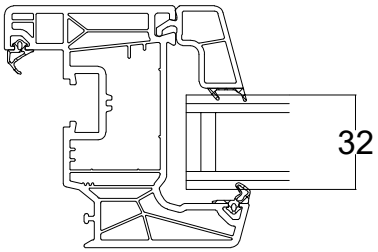


IN STOCK

19671

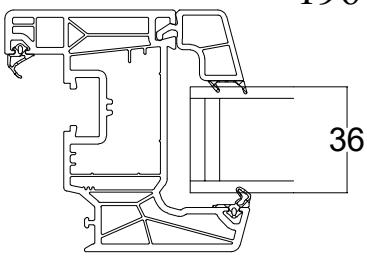


18523

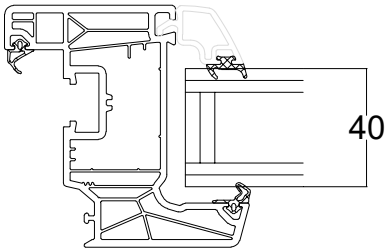


IN STOCK

19673

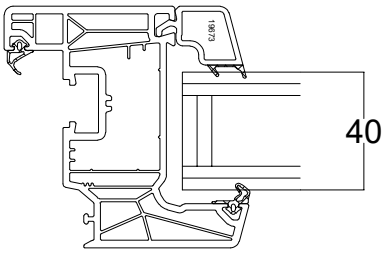


IN STOCK


19677

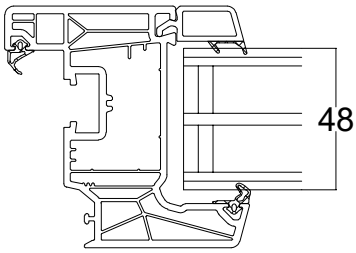


19679

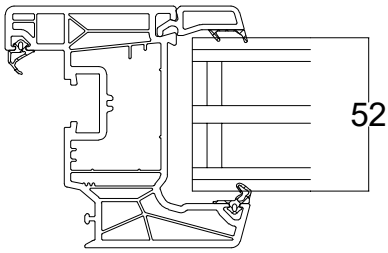


19675

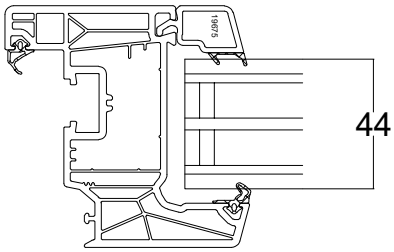


19661

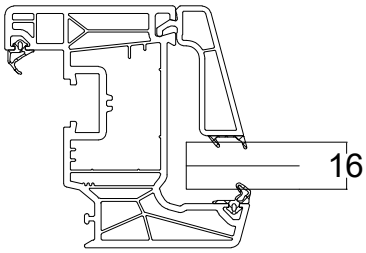


19683



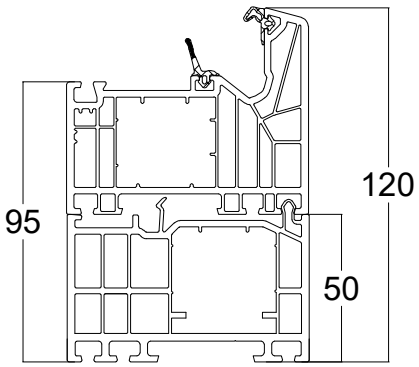


L 70

19257
50-mm
STRETCHER

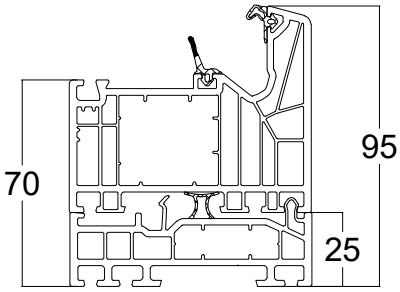


L 70


19256
25-mm
STRETCHER

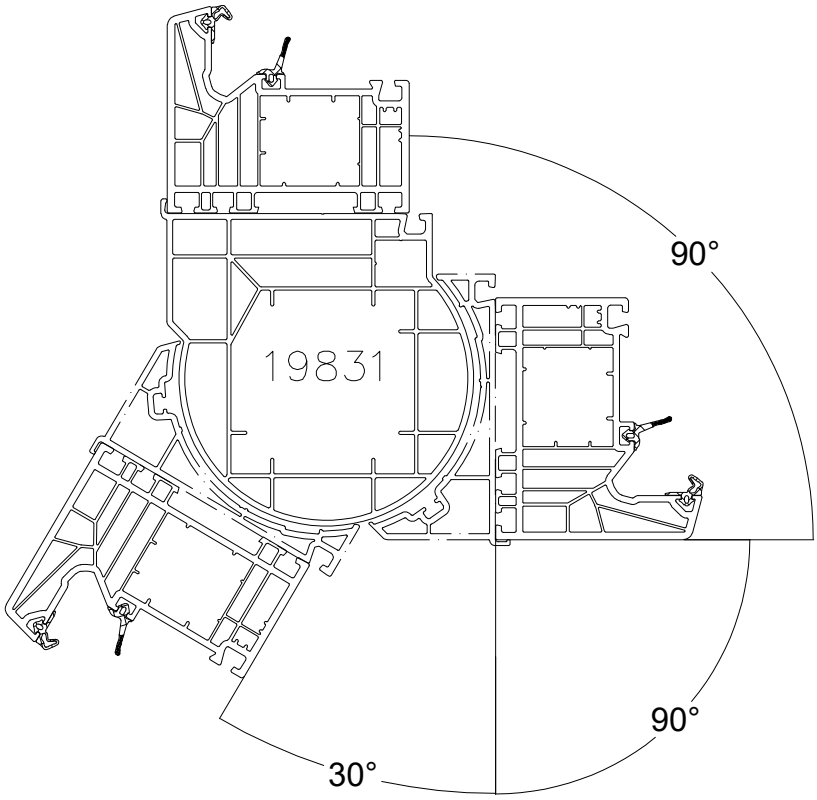


ADJUSTABLE ANGLE JOINT
MINIMUM ANGLE 90°
MAXIMUM ANGLE 211°

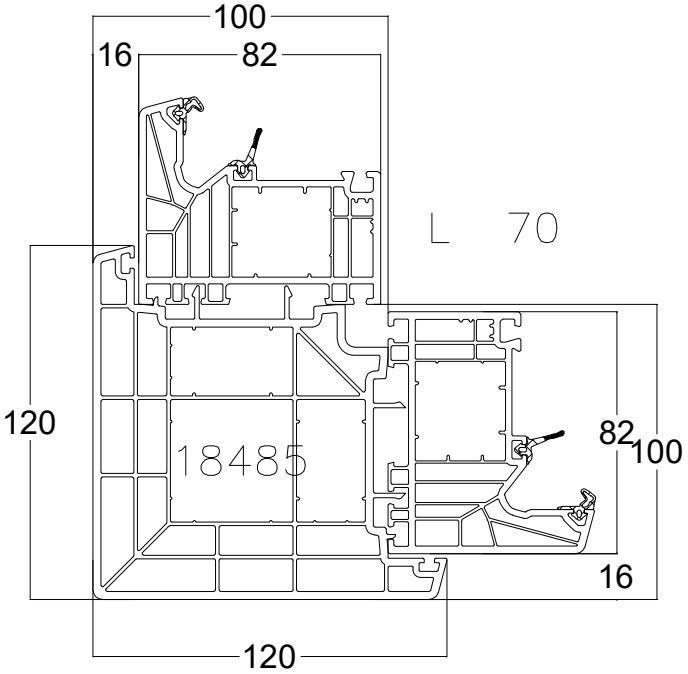


90° ANGLE JOINT - 120 mm

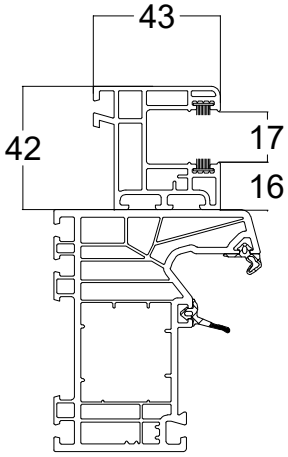

FIXED PVC GUIDE

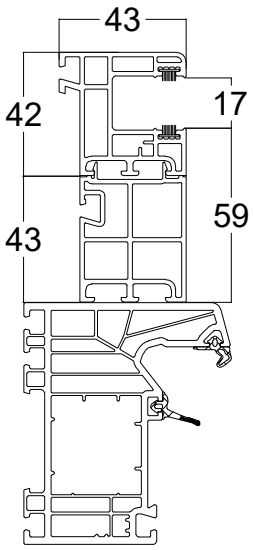


FIXED PVC GUIDE WITH STRETCHER

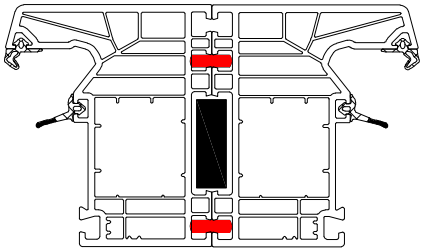


COUPLING SLAT WITH SOLID STEEL REINFORCEMENT COLUMN


PVC SLATS

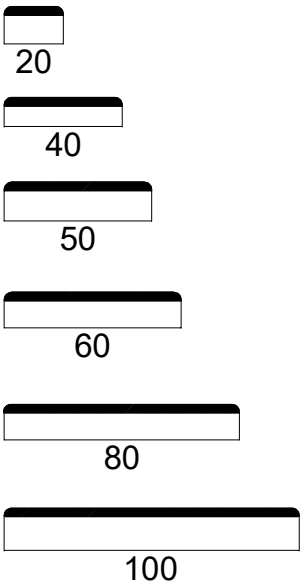


BOX-SECTION

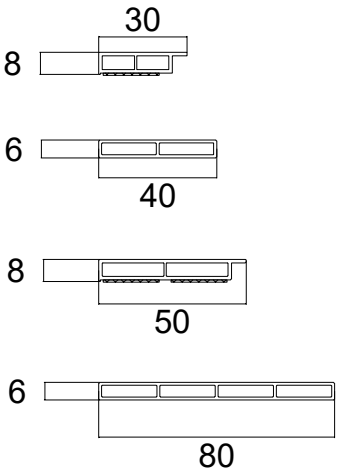

ANGULAR

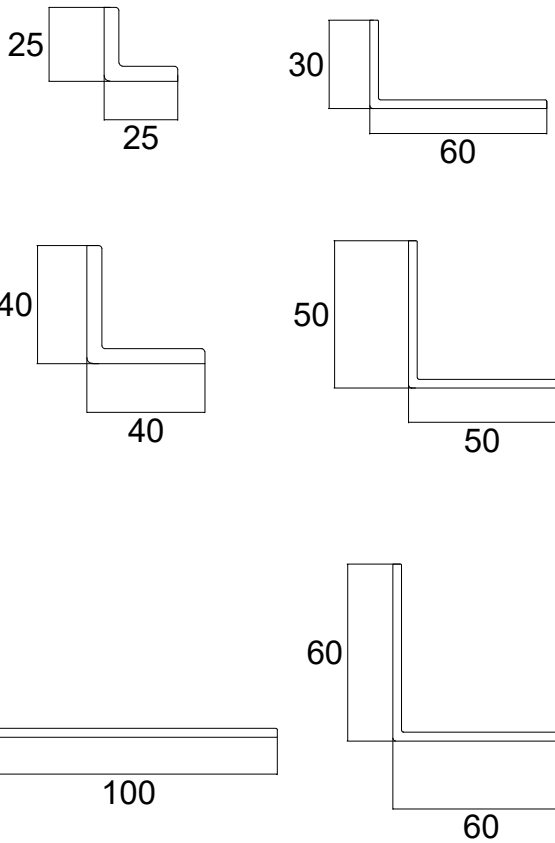


FRENCH DOOR SIZE LIMITS

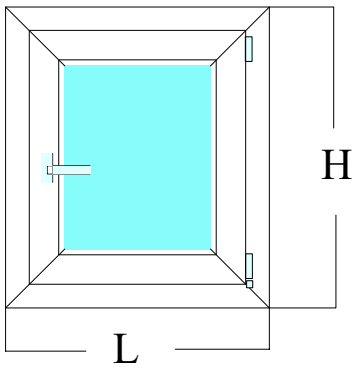


L min 600 L max 1100
H min 1800 H max 2200

MAX WEIGHT (frame + windowpane): 100 kg
e.g. 3+3 - swisspacer - 4+4 (40 kg/m^2)


FRAME OPTIONS:




CT 70
L 68




CT 70
Z 30




CT 70
Z 38




CT 70
Z 50




LIV 82
MD
L 70



LIV 82
MD
Z 50




LIV 82
AS
L 70




LIV 82
AS
Z 50

CT 70 DOOR OPTIONS

INWARDS OPENING




OVERSIZE DOOR

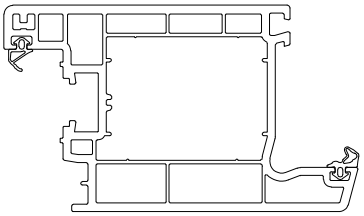


FRENCH DOOR

OUTWARDS OPENING




OVERSIZE DOOR

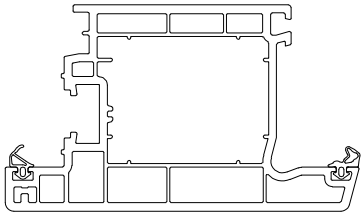


FRENCH DOOR

LIVING 82 DOOR OPTIONS

INWARDS OPENING




OVERSIZE DOOR

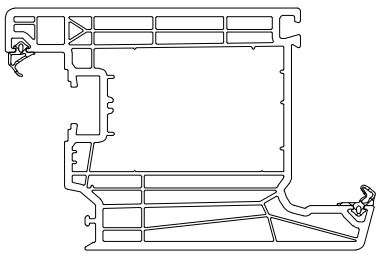


FRENCH DOOR

OUTWARDS OPENING



OVERSIZE DOOR

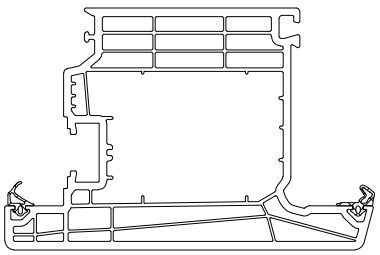

FRENCH DOOR

TYPE OF CLOSURE:

ESPAGNOLETTE WITH MUSHROOM CAMS:

Latch bolt and lever kit
Mushroom cams activated by cylinder
Cylinder with 4 key copies
May be mounted on all door-frame combinations
Inner handle compulsory
Outer handle optional

3-POINT AUTOMATIC ESPAGNOLETTE:

Latch bolt and lever kit
Automatically activated bolts
Cylinder with 4 key copies
May be mounted on all door-frame combinations
Inner handle compulsory
Outer handle optional

3-POINT AUTOMATIC ESPAGNOLETTE FOR ELECTRIC CLOSURE:

Latch bolt and lever kit
Electric control voltage: 24 volts
Bolts activated by cylinder
Cylinder with 4 key copies
May be mounted on all door-frame combinations
Inner handle compulsory
Outer handle optional

DK “GAKK” ESPAGNOLETTE WITH PERIMETRAL MUSHROOM CAMS:

Only available for inward-opening doors
Kit WITHOUT latch bolt and lever
Mushroom cams activated by handle rotation
Compulsory tilt-proof mechanism
Cylinder with 4 key copies
May be mounted on all door-frame combinations
Inner handle compulsory
Outer handle optional

CLOSURE TYPE:

PANIC EXIT KIT

Only possible with outward opening

BLACK KIT, RED OVAL CYLINDER


3 SIDE SHUNTERS (COLOUR: BLACK)

External handle and keylock unit optional

HINGE TYPE

Heavy-duty keyhole hinge for French door - model KT
H adjustment: +/- 5 mm
L adjustment: +/- 5 mm

FRENCH DOOR ACCESSORY IMAGES

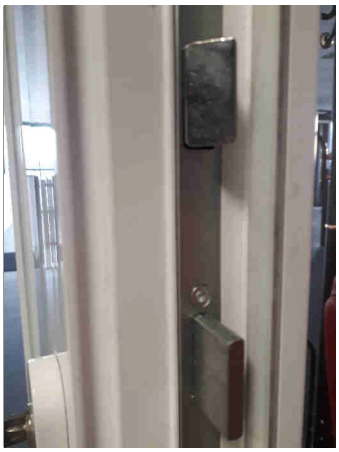

Latch bolt and lever




Automatic bolt




KT hinge


CT 70 oversize joint - inward opening
Double handle
Bolt ENTRANCE 30 mm
On SCHÜCO 24 mm plate

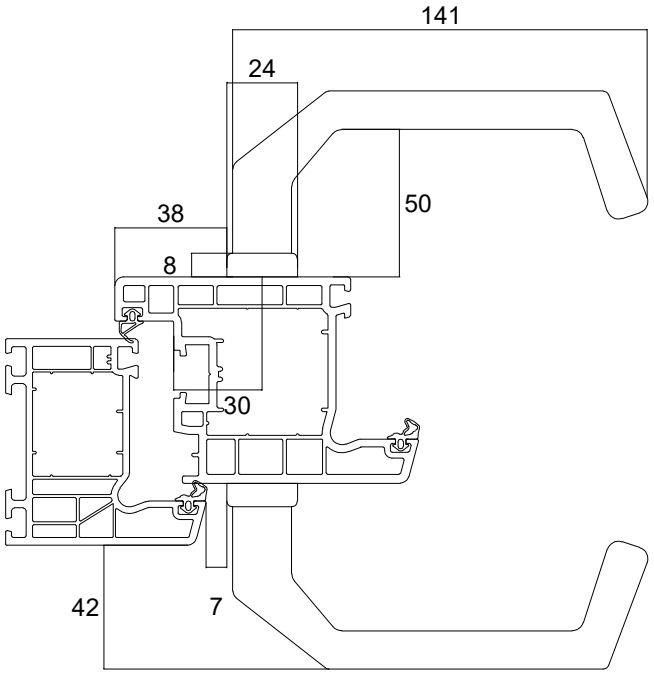


CT 70 oversize joint - inward opening
Double handle
Bolt ENTRANCE 30 mm
On SCHÜCO 24 mm plate
WITH LOWERED OUTER EDGE

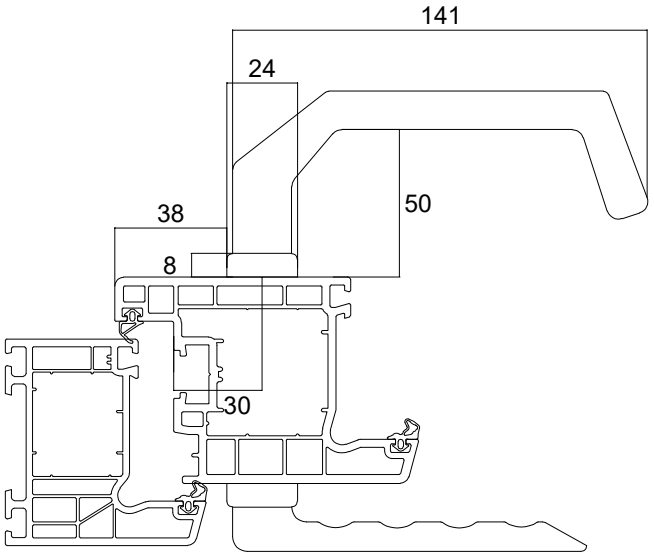


CT 70 oversize joint -
OUTWARD opening
Double handle
Bolt ENTRANCE 30 mm
On SCHÜCO 24 mm plate

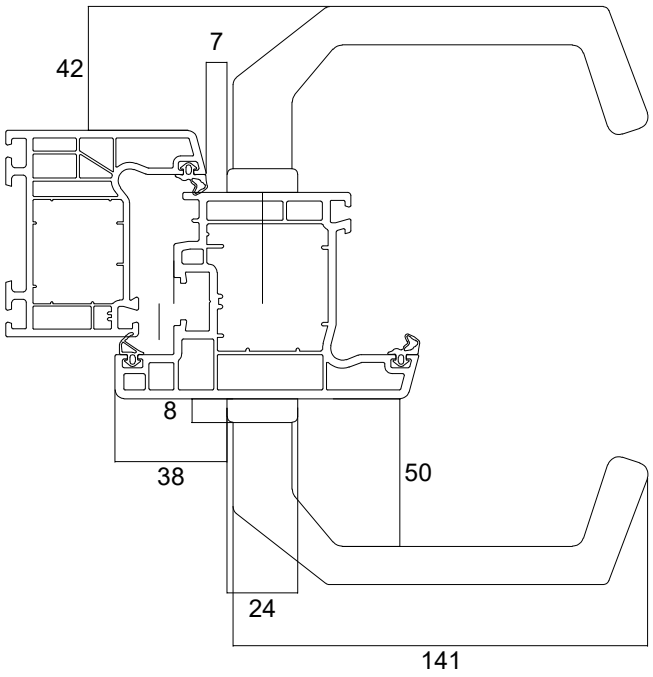


CT 70 FRENCH DOOR joint -
OUTWARD opening
Double handle
Bolt ENTRANCE 45 mm
On SCHÜCO 36 mm plate

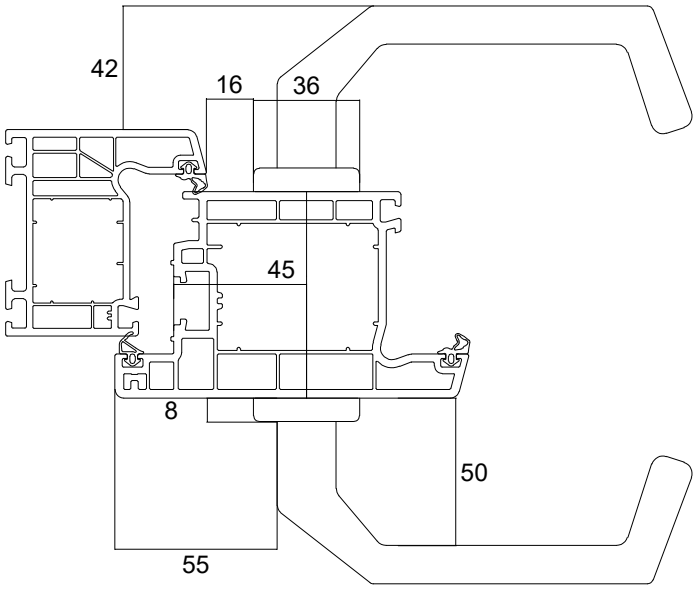


CT 70 FRENCH DOOR
joint - INWARD opening
Double handle
Bolt ENTRANCE 45 mm
On SCHÜCO 36 mm plate

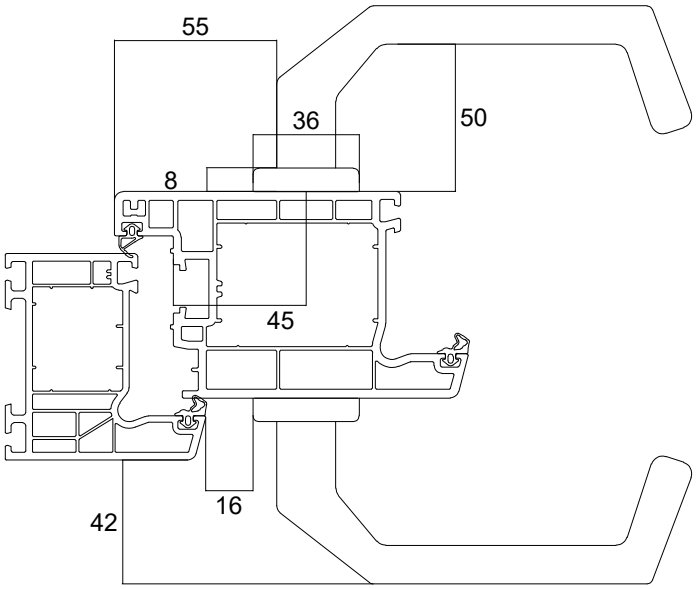


CT 70 FRENCH DOOR joint -
INWARD opening
Double handle
Bolt ENTRANCE 45 mm
On SCHÜCO 36 mm plate
WITH LOWERED OUTER EDGE

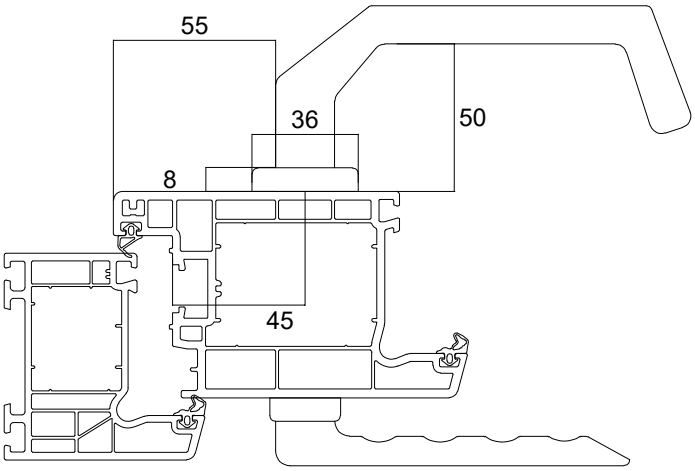


LIVING 82 oversize joint - inward opening
Double handle
Bolt ENTRANCE 35 mm
On SCHÜCO 24 mm plate

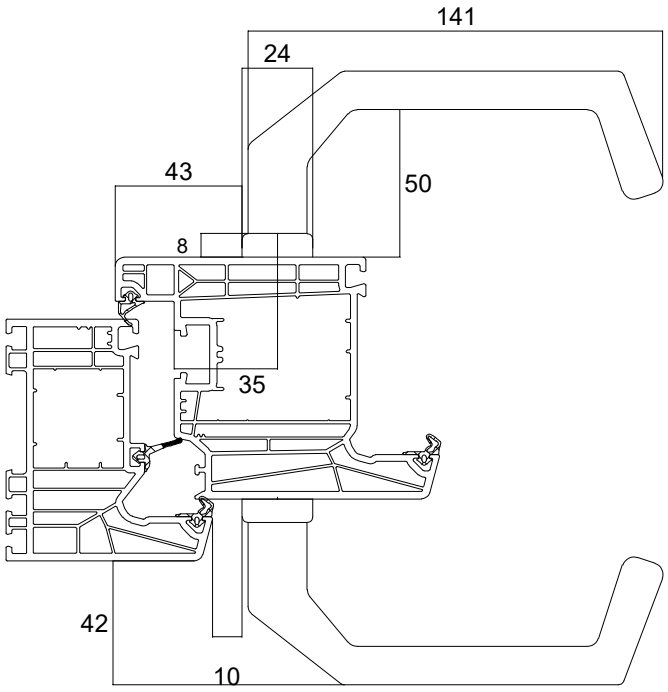


LIVING 82 oversize joint - inward opening
Double handle
Bolt ENTRANCE 35 mm
On SCHÜCO 24 mm plate
WITH LOWERED OUTER EDGE

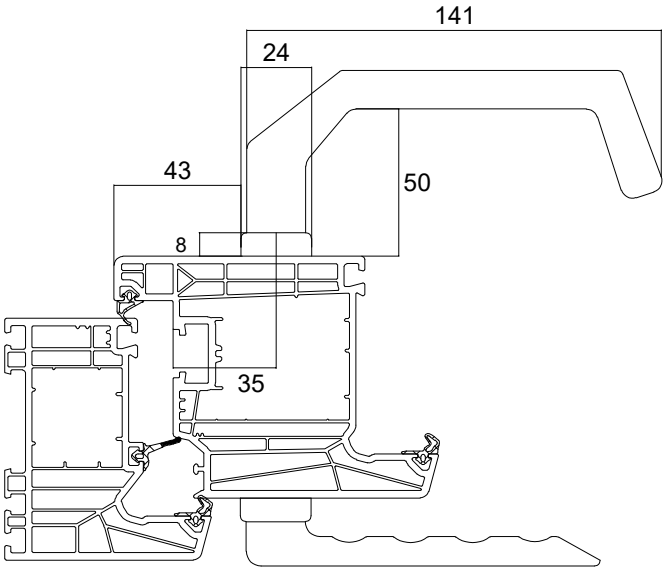


LIVING 82 oversize joint - inward opening
Double handle
Bolt ENTRANCE 35 mm
On SCHÜCO 24 mm plate

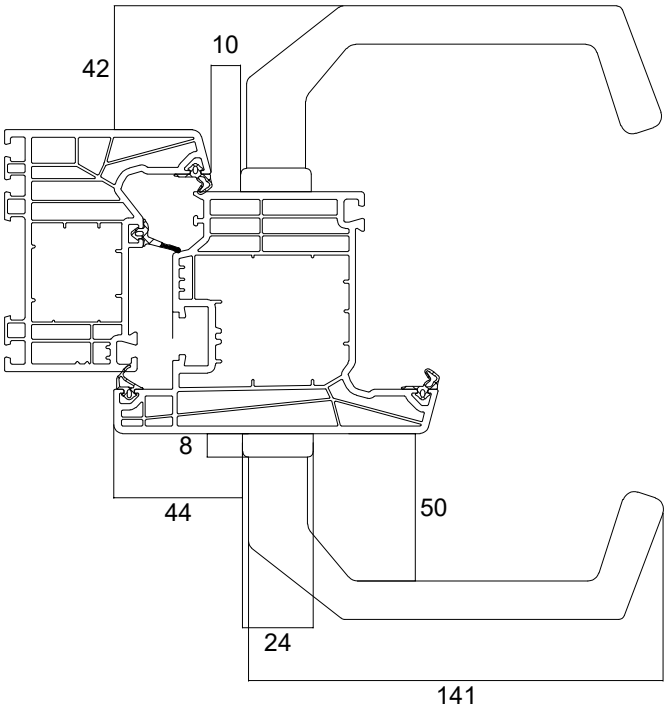


LIVING 82 FRENCH DOOR joint - OUTWARD opening
Double handle
Bolt ENTRANCE 45 mm
On SCHÜCO 36 mm plate

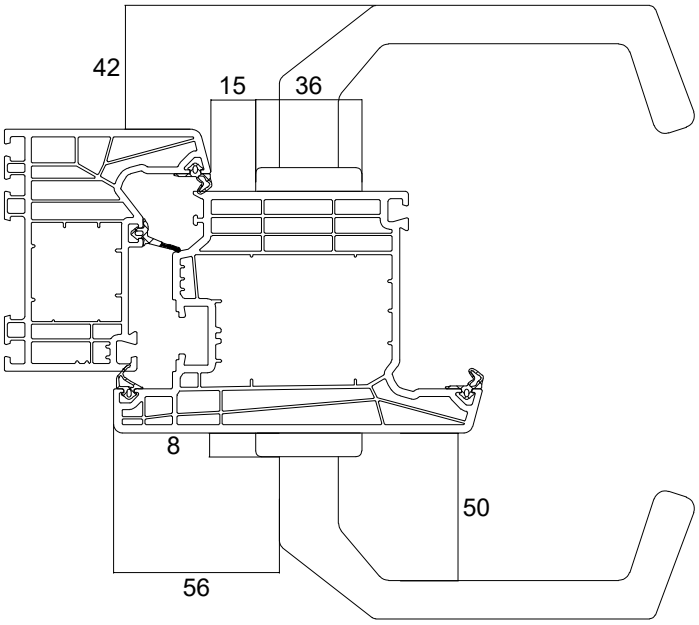


LIVING 82 oversize joint -
INWARD opening
Double handle
Bolt ENTRANCE 45 mm
On SCHÜCO 36 mm plate

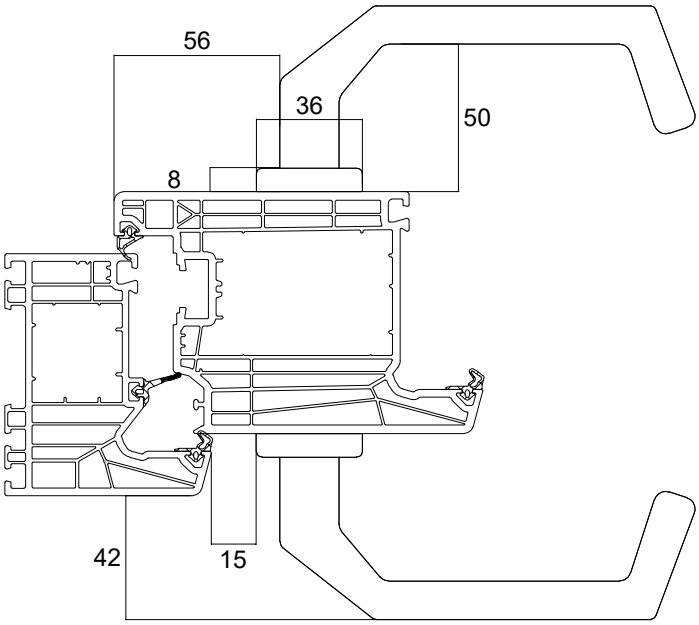


LIVING 82 FRENCH DOOR joint
- INWARD opening
Double handle
Bolt ENTRANCE 45 mm
On SCHÜCO 36 mm plate
WITH LOWERED OUTER EDGE

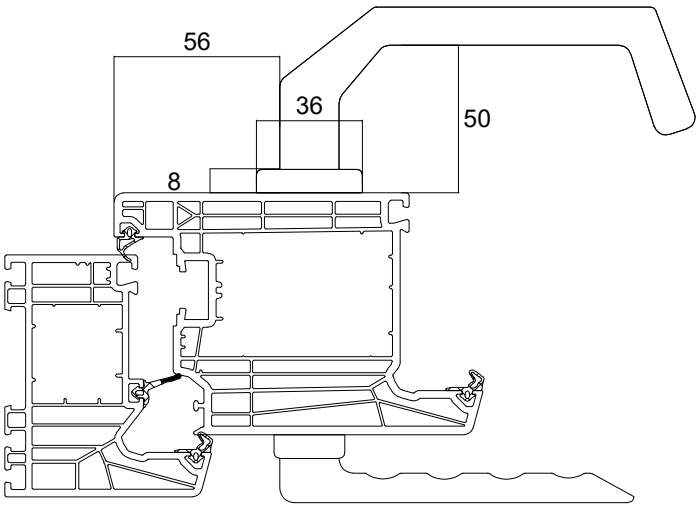


LIVING 82 joint for FRENCH DOOR - INWARD opening OVERALL DIMENSIONS OF L-FRAME HINGE

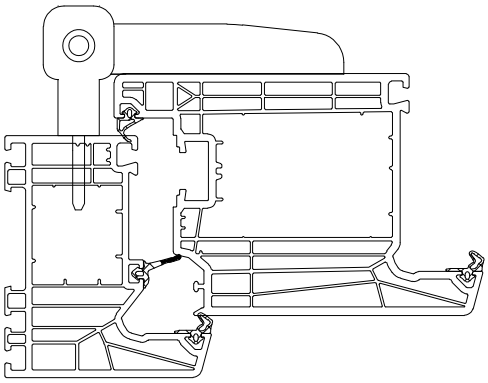


LIVING 82 oversize joint - INWARD opening OVERALL DIMENSIONS OF Z-FRAME HINGE

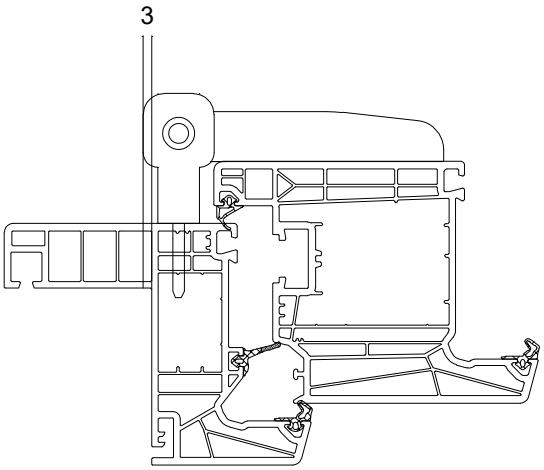


CT 70 joint for FRENCH DOOR - INWARD opening OVERALL DIMENSIONS OF L-FRAME HINGE

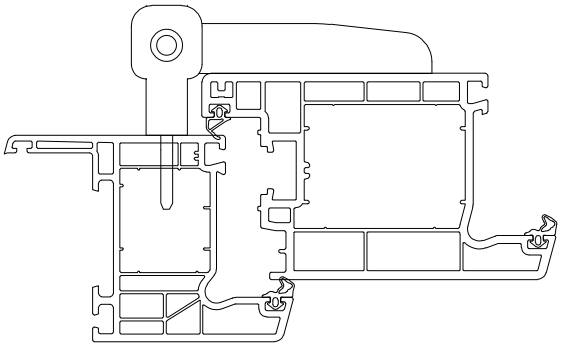


CT 70 oversize joint - INWARD opening OVERALL DIMENSIONS OF Z-FRAME (38) HINGE

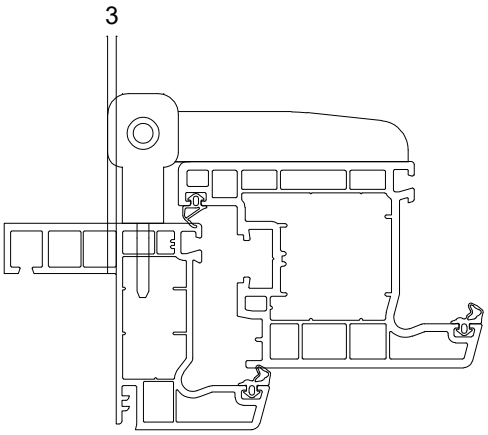

TOP RAIL

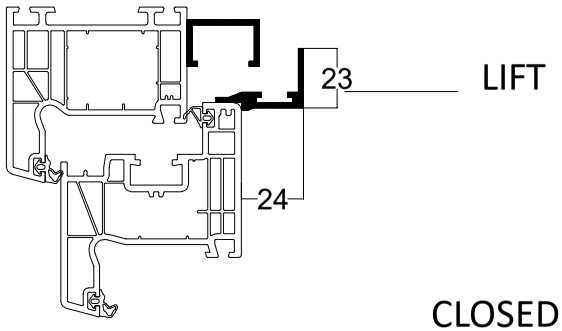


CLOSED POSITION

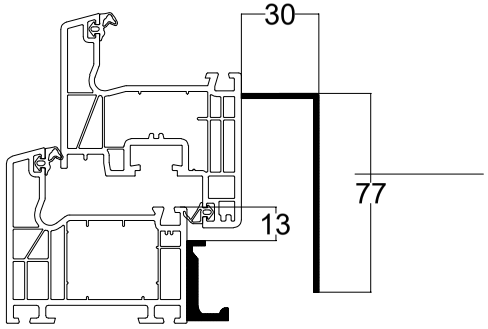



RAIL GUARD

BOTTOM RAIL

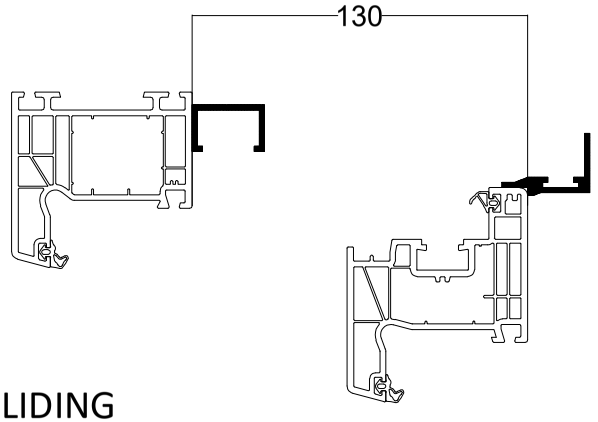



SLIDING POSITION

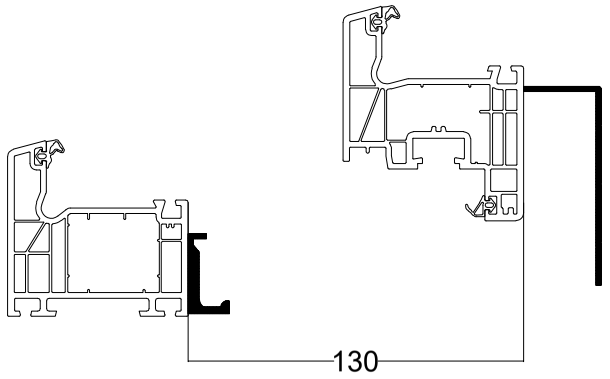

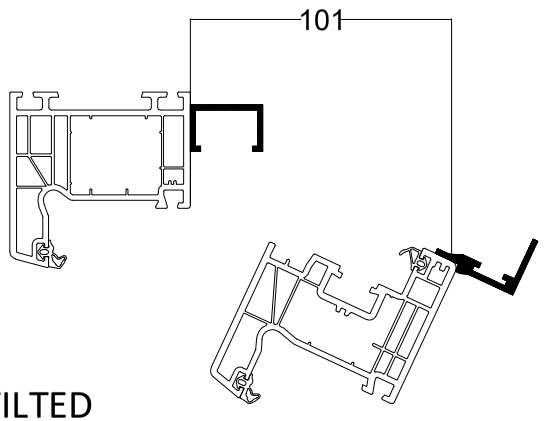


TILTED POSITION

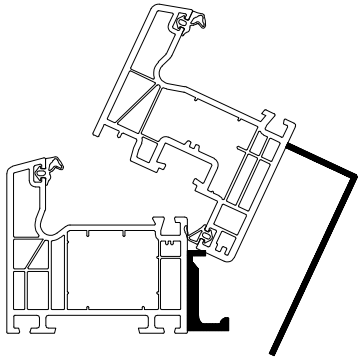

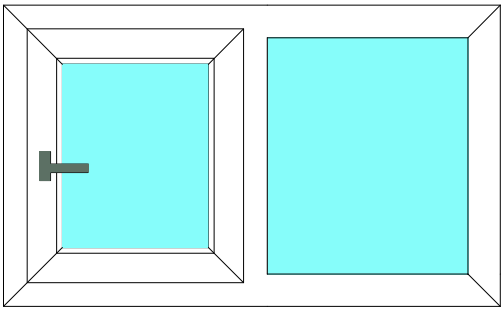


1 OPENING DOOR + 1 FIXED PANE VERSION

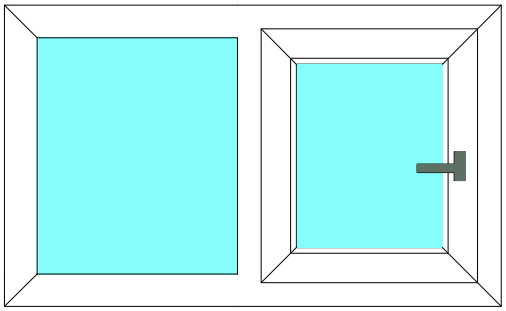


LEFT-HANDED

RIGHT-HANDED

L min 1600 L max 3200
H min 800 H max 2400
TOTAL LOAD: 160 kg

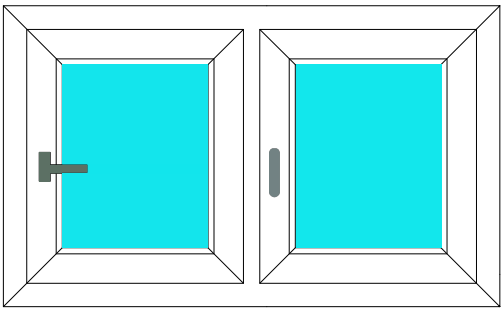

1 OPENING DOOR + 1 SERVICE DOOR VERSION

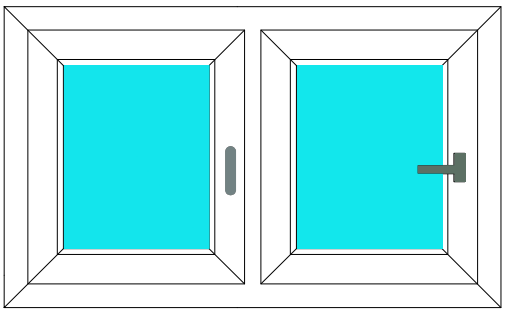


LEFT-HANDED

RIGHT-HANDED


L min 1600 L max 2200
H min 800 H max 2400
TOTAL LOAD: 160 kg

The service door may be equipped with: -
Retractable handle;
- Recessed handle


PSK SLIDING WINDOW COMBINATIONS WITH RECESSED HANDLE

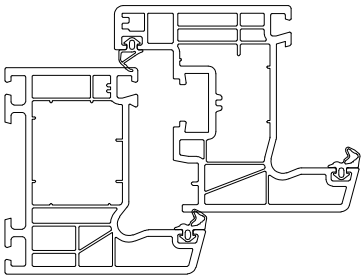

CT 70
standard joint

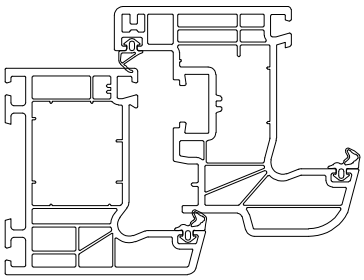


CT 70
round joint

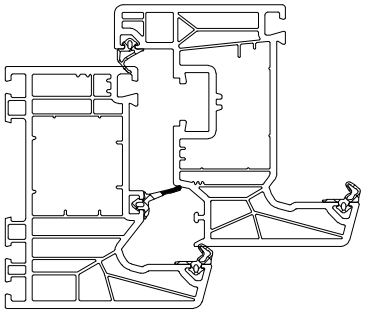


LIVING 82
standard joint

PSK SLIDING WINDOW COMBINATIONS WITH KEYLOCK


CT 70
oversize joint

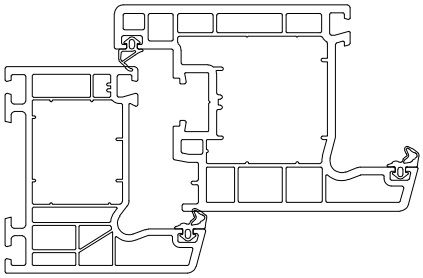


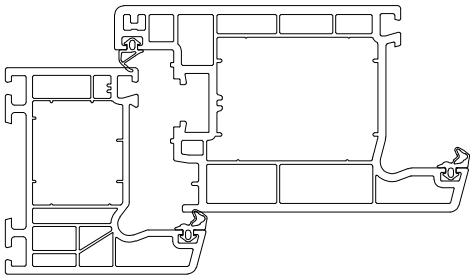

CT 70
French door joint - inward opening


LIVING 82
oversize joint

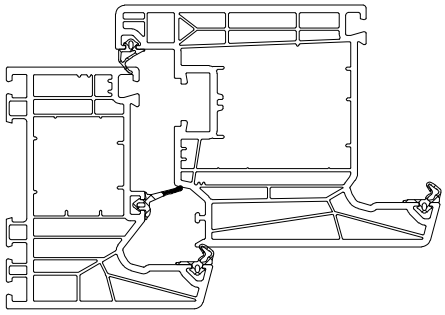

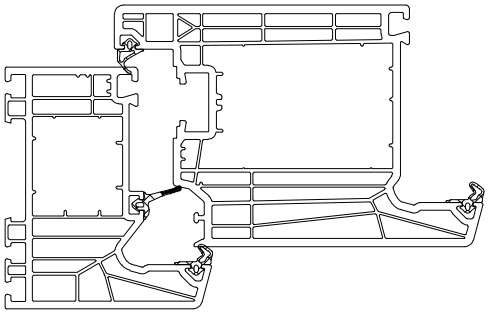


LIVING 82
French door joint

PSK SLIDING WINDOW COMBINATIONS WITH RECESSED HANDLE

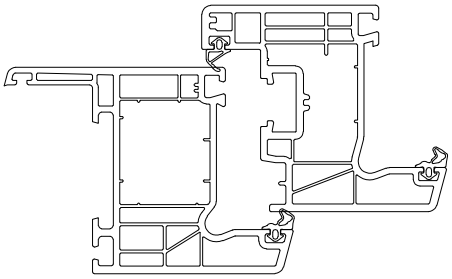


CT 70
standard joint

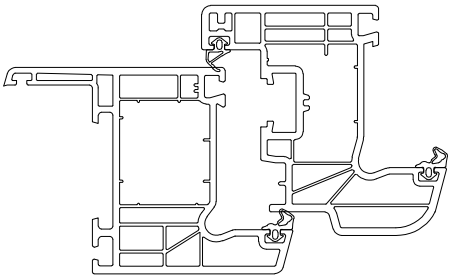


CT 70 round
joint


PSK SLIDING WINDOW COMBINATIONS WITH KEYLOCK

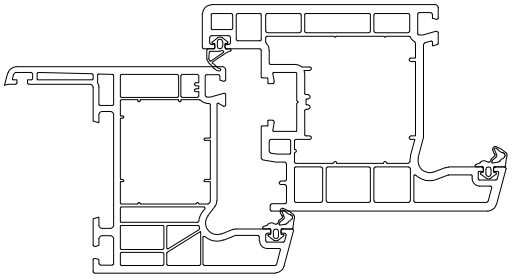


CT 70 oversize joint
- inward opening

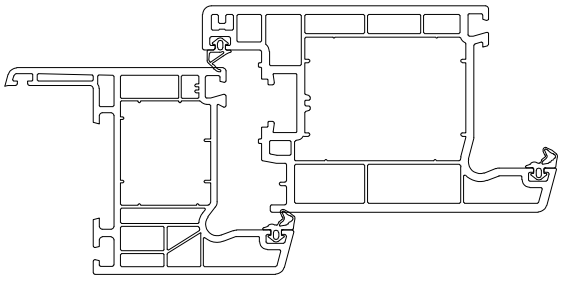


CT 70 French door joint
- inward opening

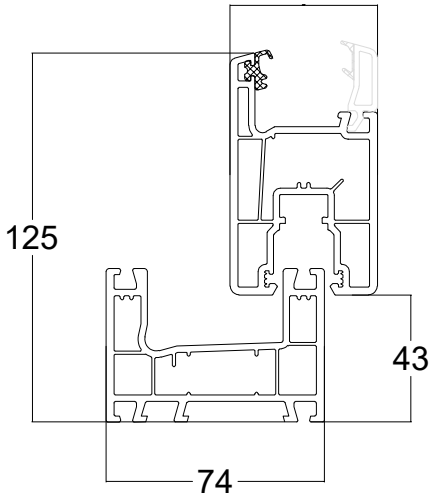


FRAME DOOR SECTION
TYPE 18856 - DOUBLE

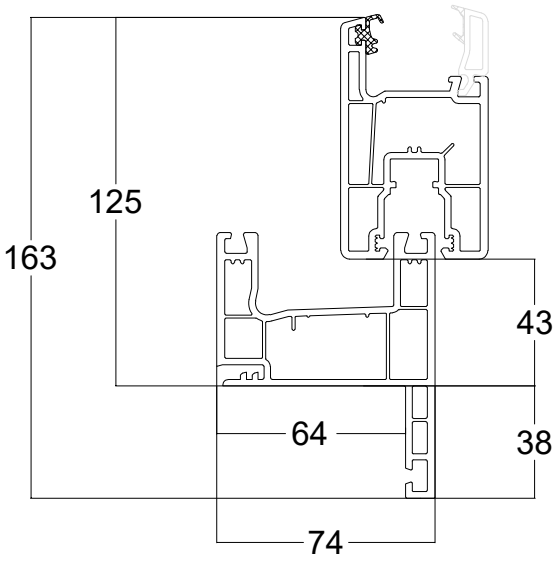


FRAME DOOR SECTION
TYPE 18879 - DOUBLE

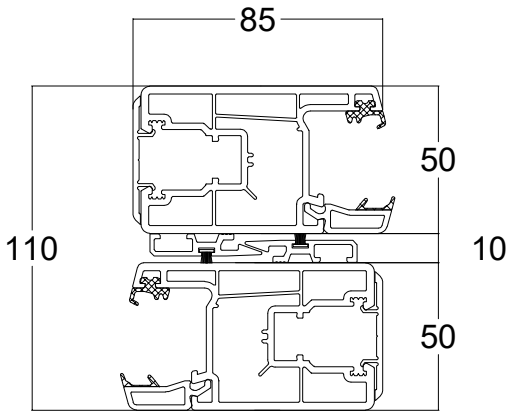


SILL DOOR SECTION
DOUBLE

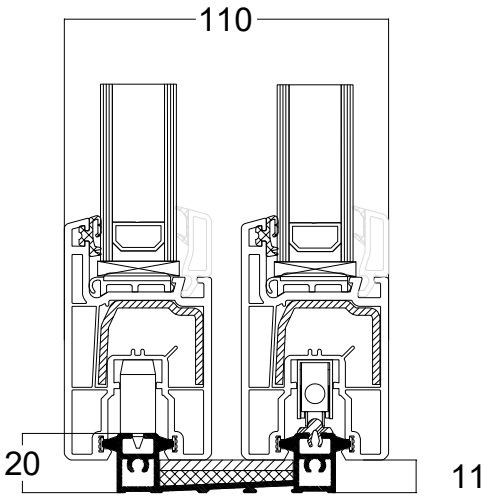



SILL DOOR SECTION
DOUBLE

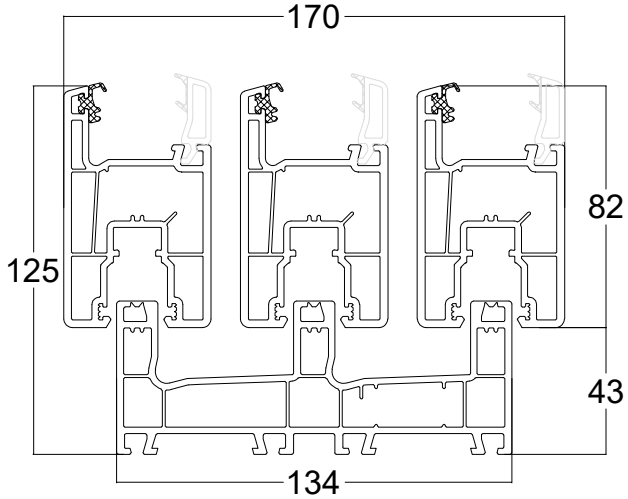


FRAME DOOR SECTION
TYPE 19158 - TRIPLE

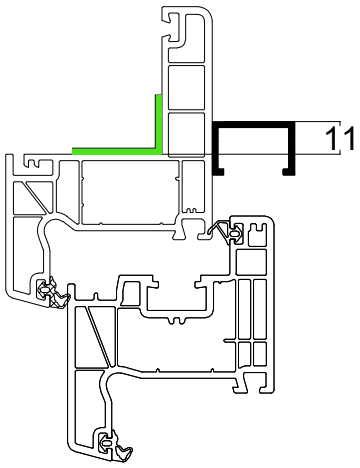

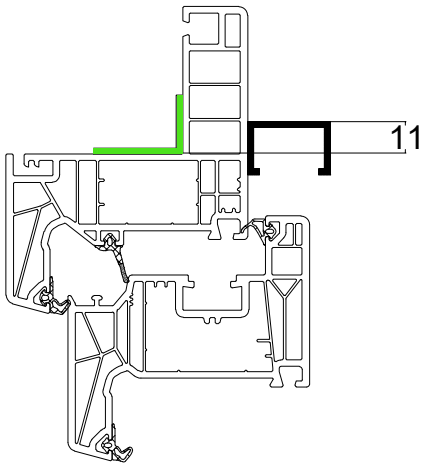

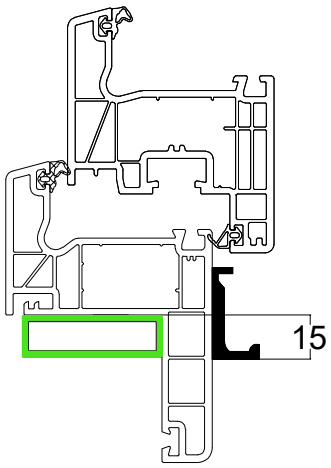


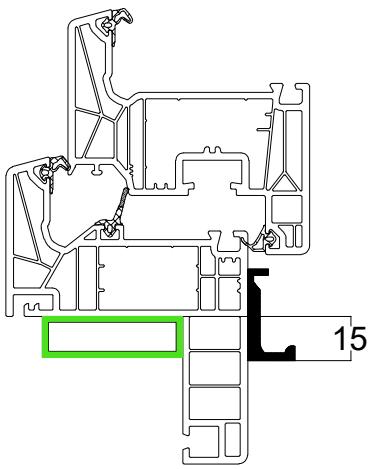

PSK SLIDING WINDOW WITH Z-FRAMES:
IF TOP AND BOTTOM TRIMMING OF THE JAMBS IS NECESSARY, IT MUST COMPLY WITH MINIMUM DIMENSIONS SPECIFIED

AN ALUMINIUM ANGULAR ELEMENT WILL BE FIXED TO THE TOP JAMB IN ORDER TO GUARANTEE A SUITABLE ANCHORAGE OF THE RAIL.


THE REMAINING PORTION OF JAMB WILL BE COMPENSATED AT THE BOTTOM EDGE.

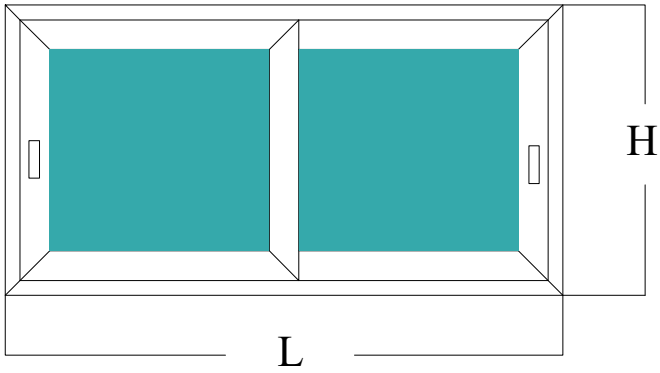

DOUBLE WINDOW FRAME

L min 1200 L max 2500
H min 1000 H max 2200


MAX WEIGHT PER WINDOW
(frame + windowpane): 80 kg
e.g. 3+3- swisspacer - 3+3 (30 kg/m^2)

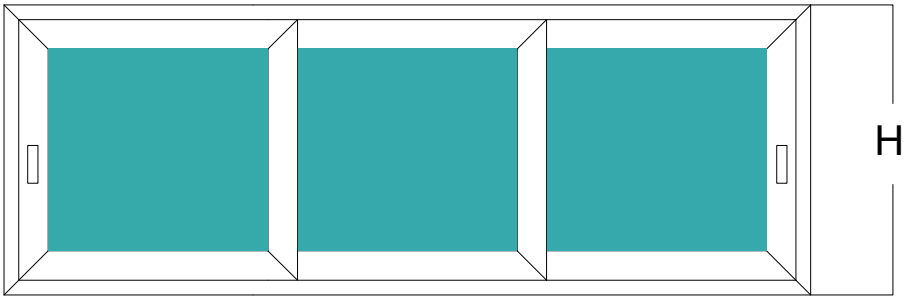

TRIPLE WINDOW FRAME

L min 1800 L max 3600
H min 1000 H max 2200

MAX WEIGHT PER WINDOW
(frame + windowpane): 80 kg
e.g. 3+3 - swisspacer - 3+3 (30 kg/m^2)

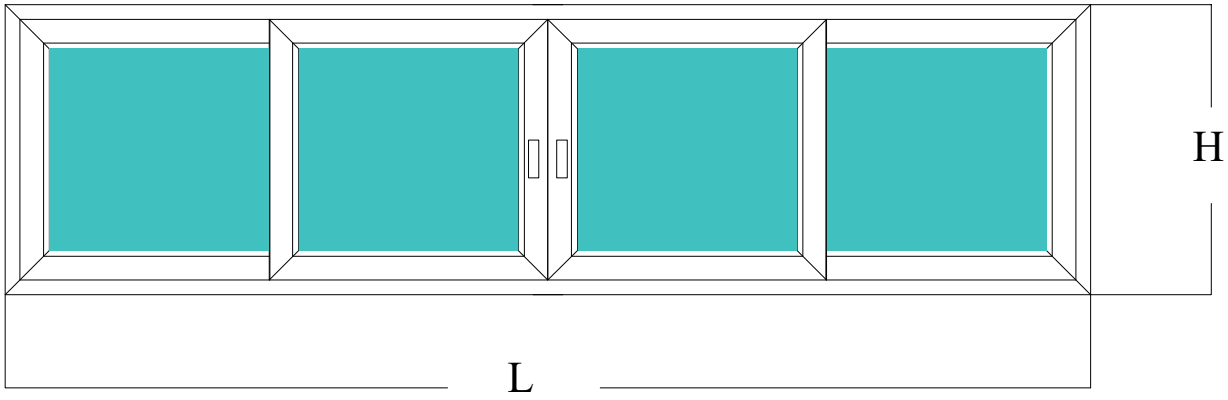


DOUBLE WINDOW FRAME

L min 2500 L max 5000
H min 1000 H max 2200


MAX WEIGHT PER WINDOW
(frame + windowpane): 80 kg
e.g. 3+3 - swisspacer - 3+3 (30 kg/m^2)

ACCESSORIES:
ADJUSTABLE RAILS
RECESSED HANDLE (STANDARD)
DK HANDLE only for internal face (ONLY UPON REQUEST)
CYLINDRICAL LOCK IN THROUGH-HOLE (ONLY UPON REQUEST)


19679

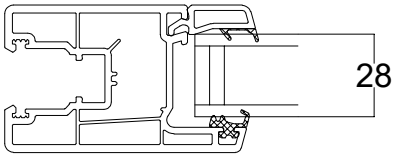


19677

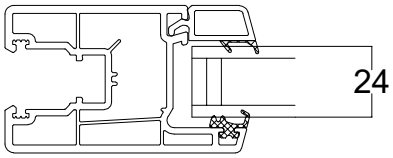


19675




19669

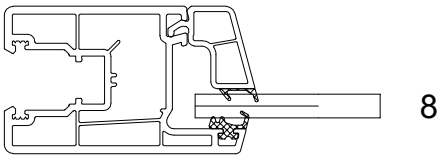


19667

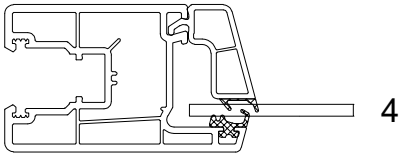


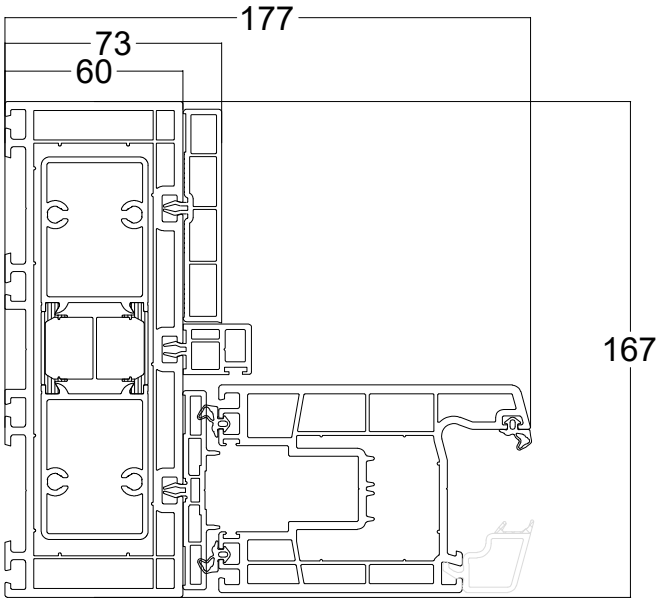


OPENING WINDOW
LATERAL AND TOP SECTION

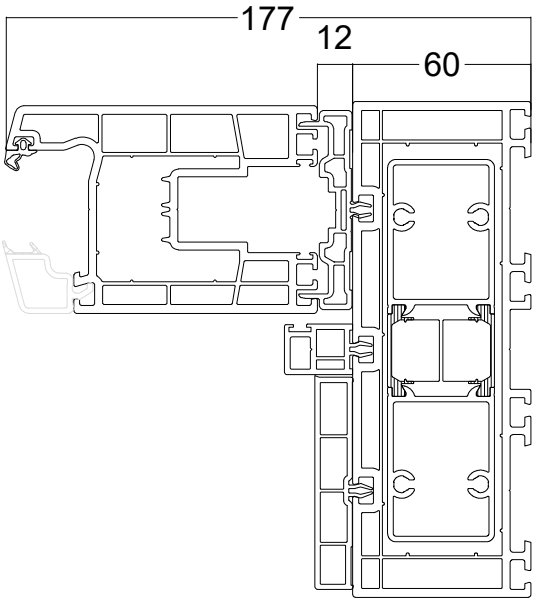


FIXED WINDOW
LATERAL AND TOP SECTION

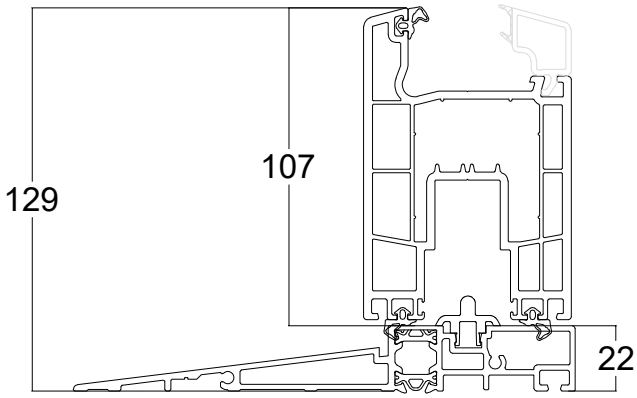


OUTER SILL SECTION

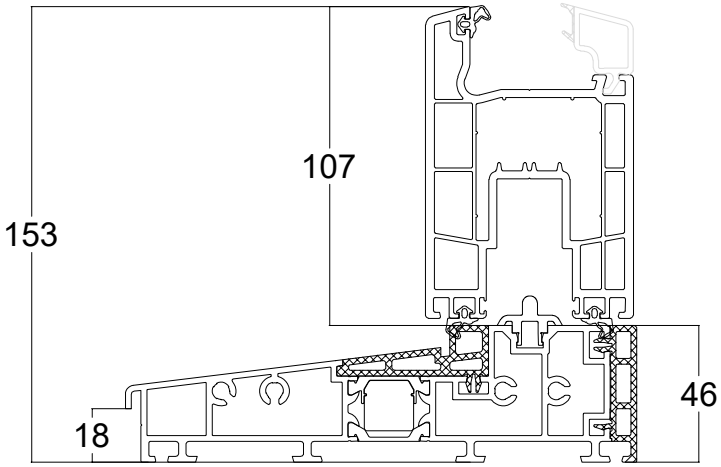


EMBEDDED SILL SECTION

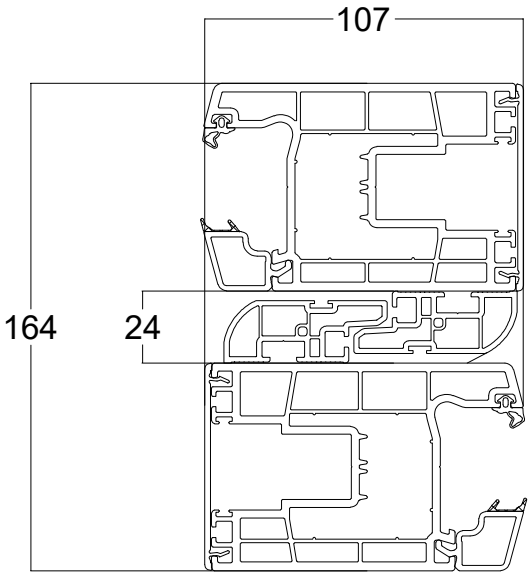

CENTRAL JOINT SECTION
OPENING WINDOW + FIXED WINDOW

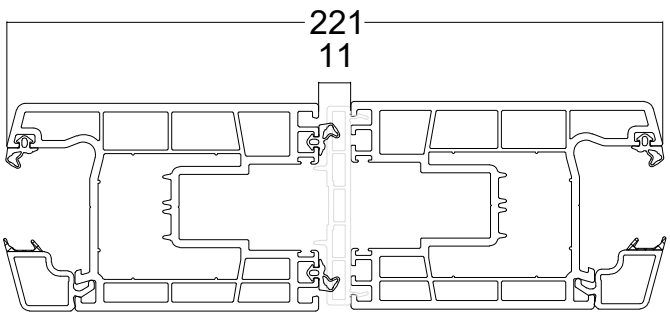


CENTRAL JOINT SECTION
4 DOORS WITH LATERAL FIXED WINDOWS

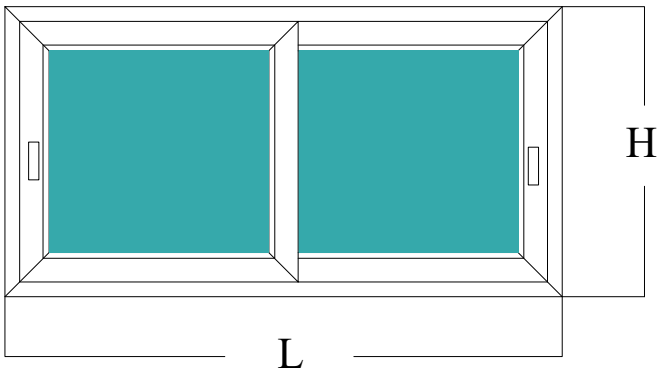


L min 1800 L max 4500
H min 1300 H max 2600

MAX WEIGHT PER WINDOW
(frame + windowpane): 300 kg
e.g. 4+4-4+4 swisspacer (40 kg/m^2)

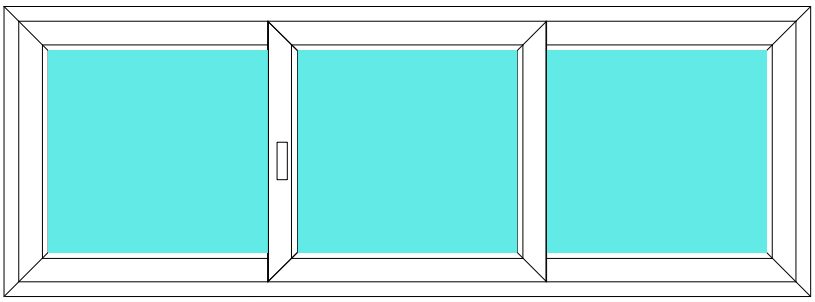


L min 2700 L max 6500
H min 1300 H max 2600

MAX WEIGHT PER WINDOW
(frame + windowpane): 300 kg
e.g. 4+4-4+4 swisspacer (40 kg/m^2)

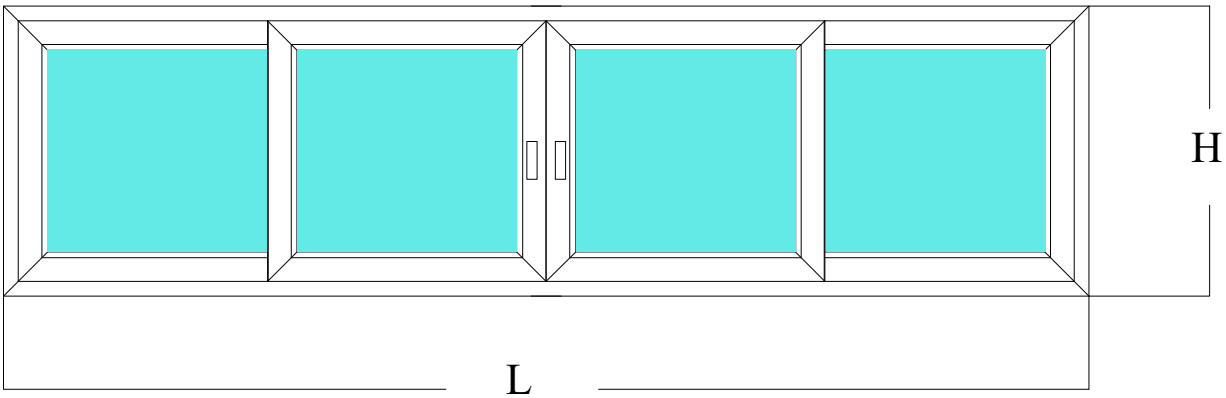


L min 3600 L max 9000
H min 1300 H max 2600


MAX WEIGHT PER WINDOW
(frame + windowpane): 300 kg
e.g. 4+4-4+4 swisspacer (40 kg/m^2)

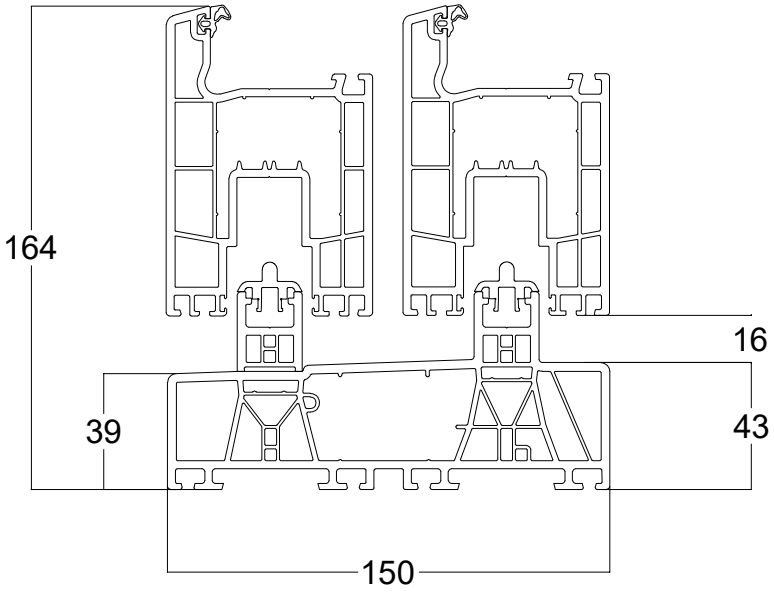


BOTTOM JOINT SECTION
WINDOW + WINDOW

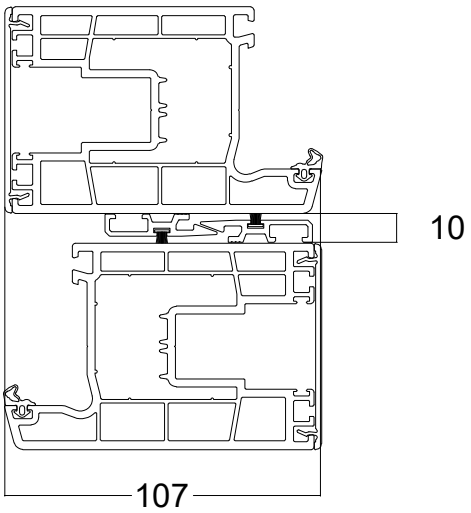

CENTRAL JOINT SECTION
WINDOW + WINDOW

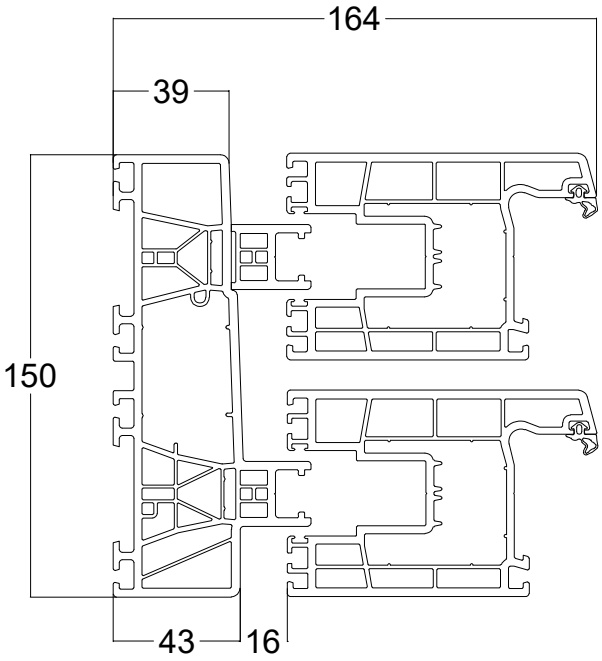


LATERAL AND TOP JOINT SECTION
WINDOW + WINDOW

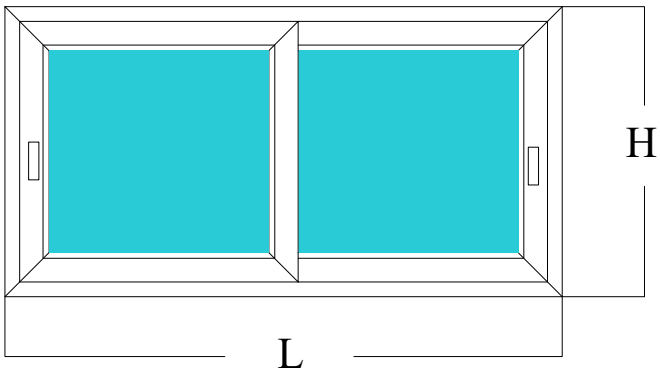


L min 1800 L max 3700
H min 1300 H max 2400

MAX WEIGHT PER WINDOW
(frame + windowpane): 250 kg
e.g. 4+4-4+4 swisspacer (40 kg/m^2)

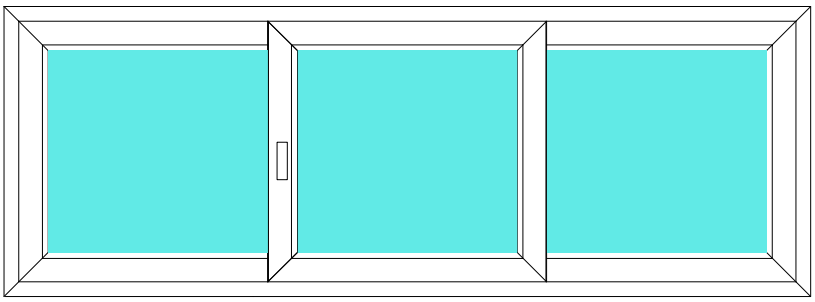

L min 2700 L max 4500
H min 1300 H max 2400


MAX WEIGHT PER WINDOW
(frame + windowpane): 250 kg
e.g. 4+4-4+4 swisspacer (40 kg/m^2)

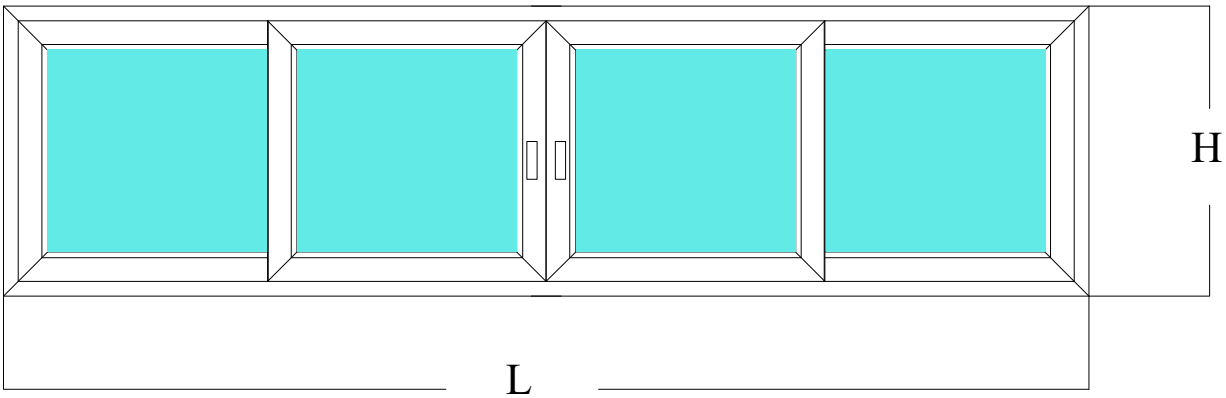

L min 3600 L max 6000
H min 1300 H max 2400


MAX WEIGHT PER WINDOW
(frame + windowpane): 250 kg
e.g. 4+4-4+4 swisspacer (40 kg/m^2)

19669

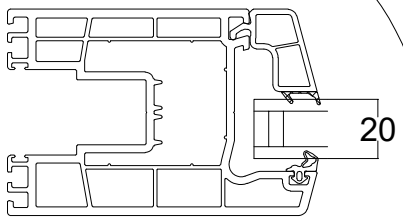


IN STOCK

19673

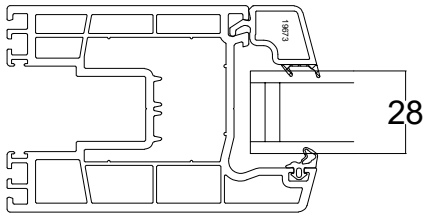


IN STOCK

18523

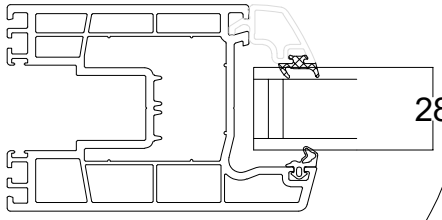


IN STOCK


19675

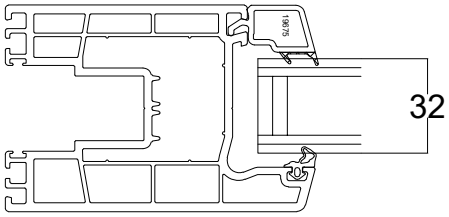


19677

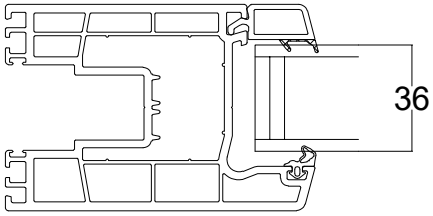


19679

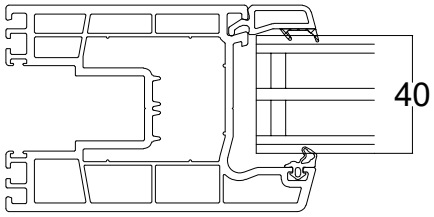


19671

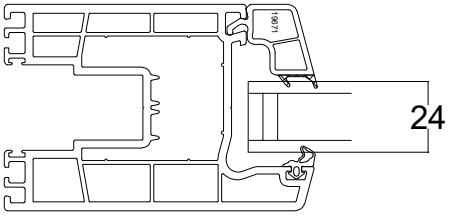



19683

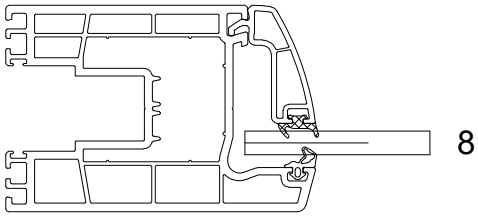


19667

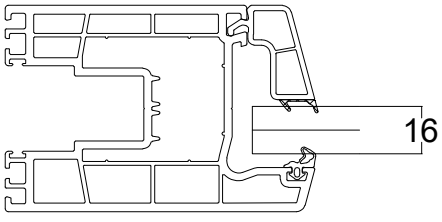


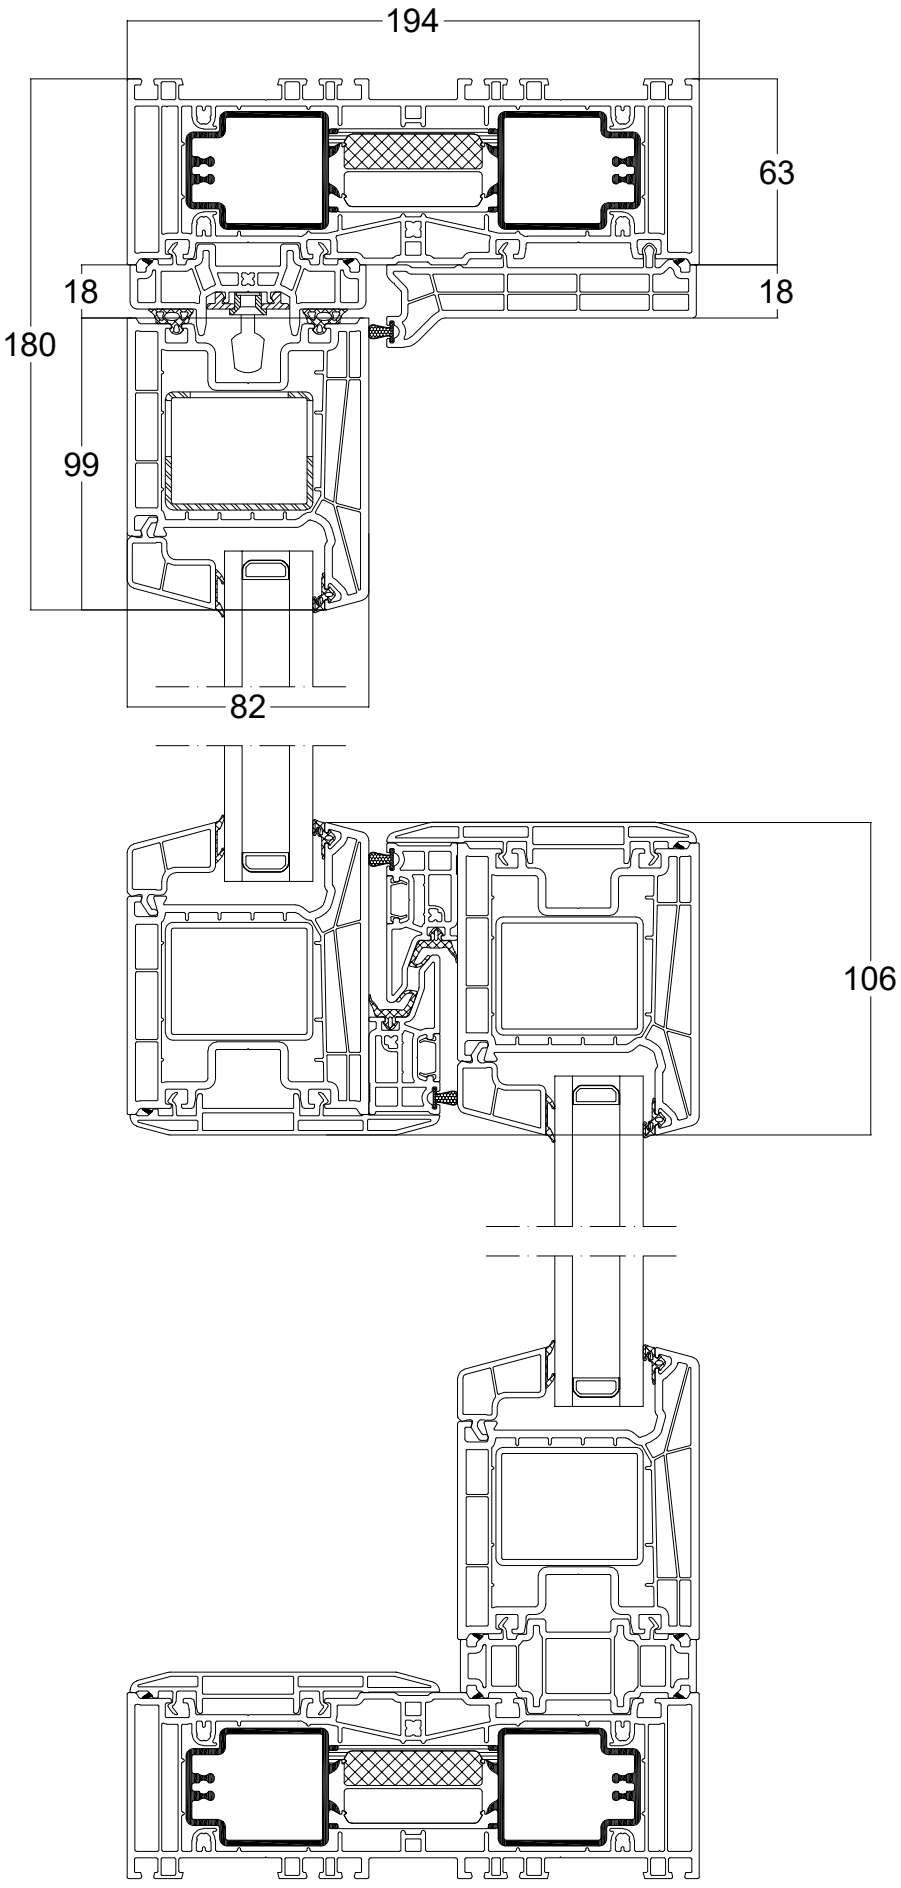
194
63
18
18
180
99
82
106

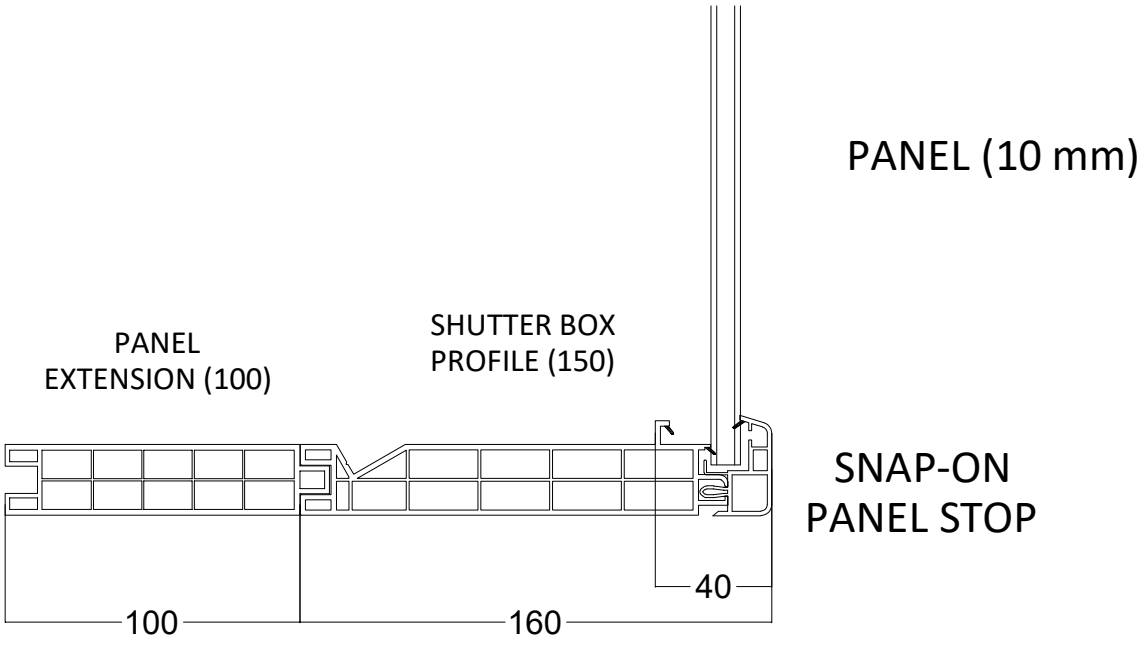
PANEL (10 mm)
PANEL EXTENSION (100)
SHUTTER BOX PROFILE (150)
SNAP-ON PANEL STOP
40
100
160

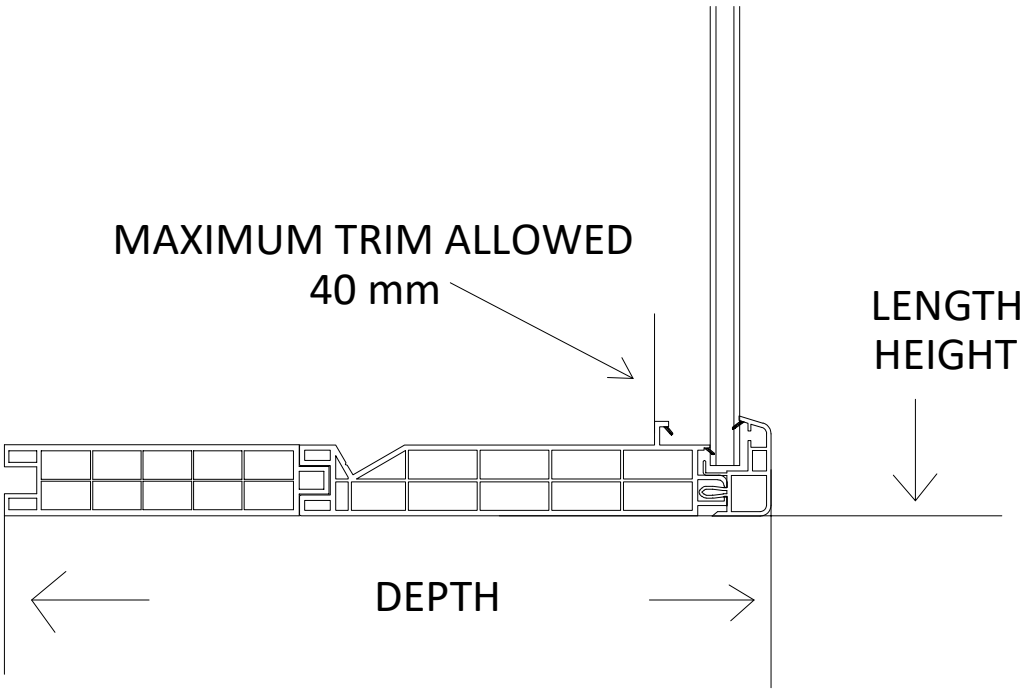

MAXIMUM TRIM ALLOWED
40 mm
LENGTH
HEIGHT
DEPTH

Dimension provided upon order:
WALL CLEARANCE

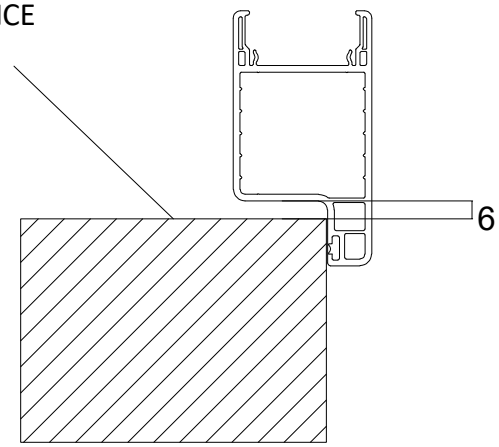


SHUTTER IN WALL VERSION

Dimension provided upon order:
DISTANCE TO OUTER FACE OF FRAME

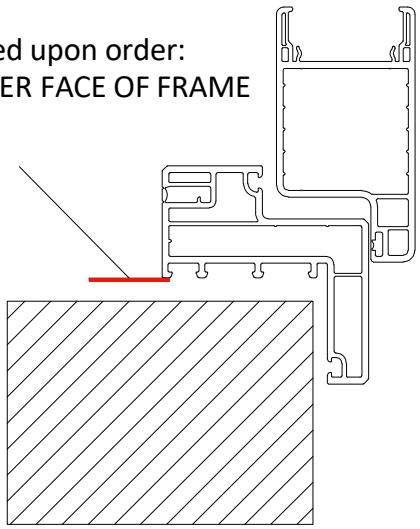

SHUTTER IN FRAME VERSION

Dimension provided upon order:
DISTANCE TO OUTER FACE OF FRAME

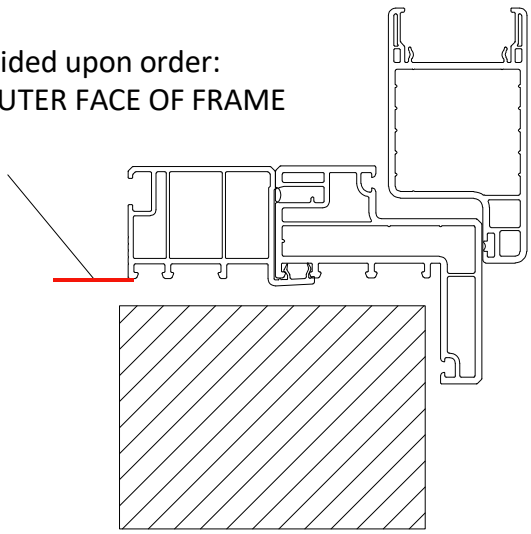

SHUTTER IN FRAME WITH STRETCHER VERSION

SIZE LIMITS

L min 350 L max 700
H mim 500 H max 2700

Per H >1700 one traverse inserted
Per H > 2500 two traverses inserted

AVAILABLE PANELS:

Adjustable plate
Fixed plate
Vertical solid slat
Horizontal solid slat


HARDWARE INCLUDED:

OMAD galvanized black iron set square
AGB galvanized black iron espagnolette
Chemically anchored hinges to insert with safety stop


HARDWARE AVAILABLE UPON REQUEST:

Galvanized stainless-steel set square to be painted in matching colour
Galvanized silver-colour stainless-steel espagnolette
Chemically anchored stainless-steel hinges to be painted in matching colour and to insert with safety stop


CT 70 JOINT FOR FAUX WOOD ALUMINIUM FRAMES

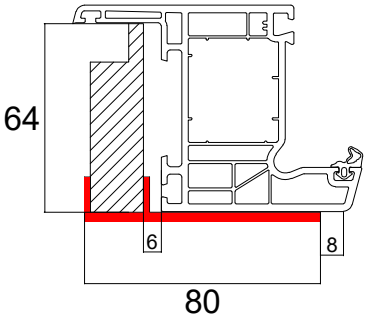


Z 30
cod 19021

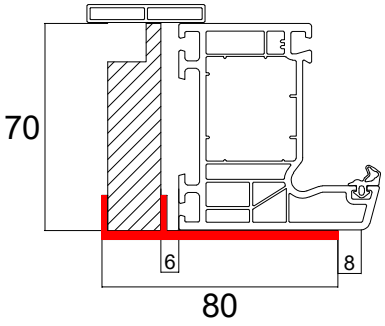

L 68
cod 18865

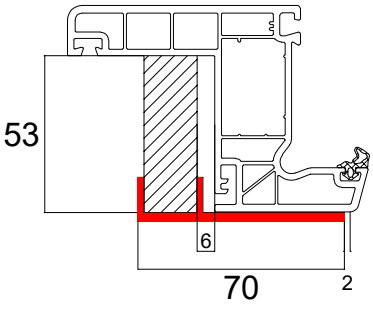


Z 50
cod 19703

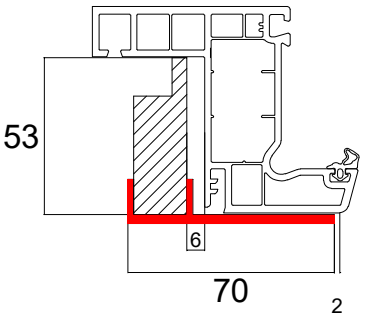


Z 38
cod 18899


CT 70 JOINT FOR FAUX WOOD ALUMINIUM FRAMES WITH VERTICAL COLIBRI MOSQUITO SCREEN

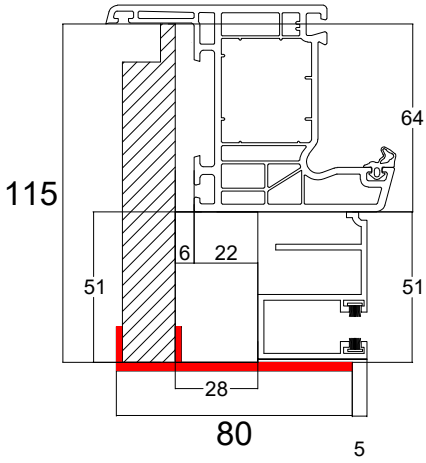


Z 30
cod 19021

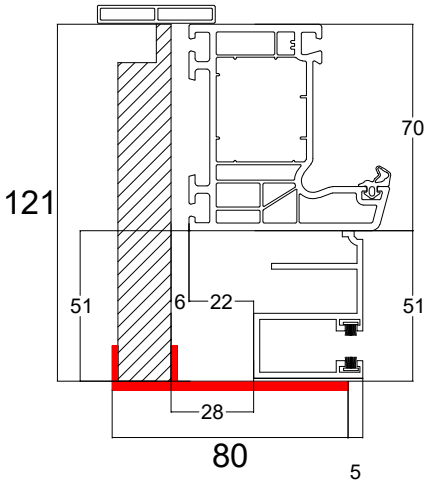

L 68
cod 18865

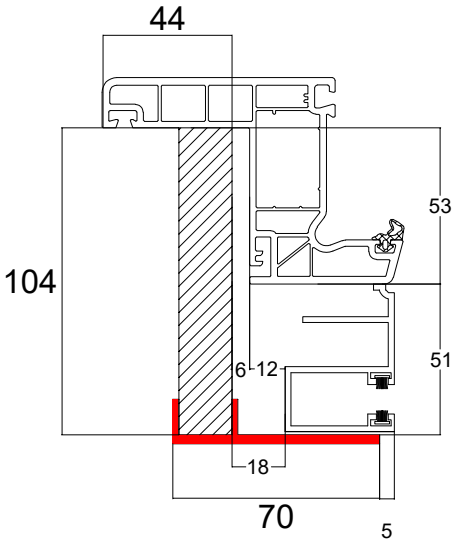


Z 50
cod 19703

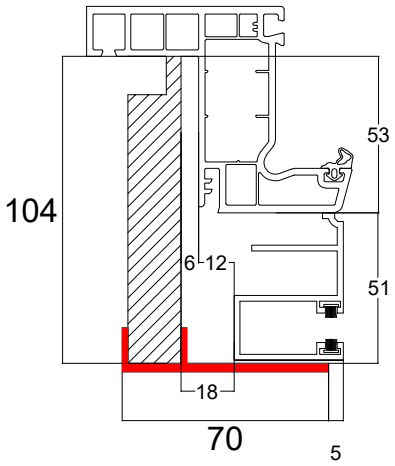


Z 38
cod 18899


CT 70 JOINT FOR FAUX WOOD ALUMINIUM FRAMES WITH LATERAL SILENT MOSQUITO SCREEN

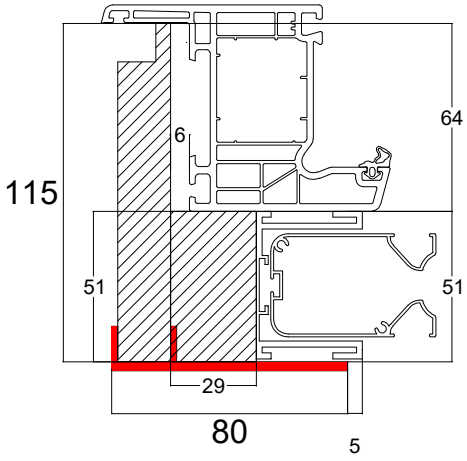


Z 30
cod 19021
CLOSURE END

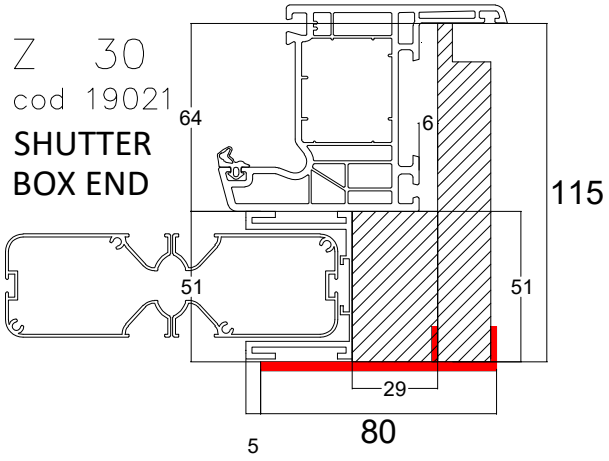

Z 30
cod 19021
SHUTTER BOX END

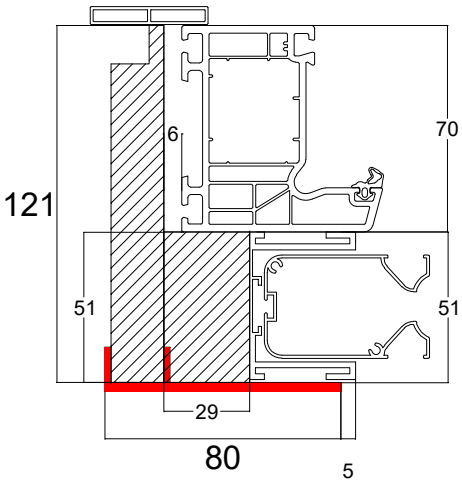


L 68
cod 18865
CLOSURE END

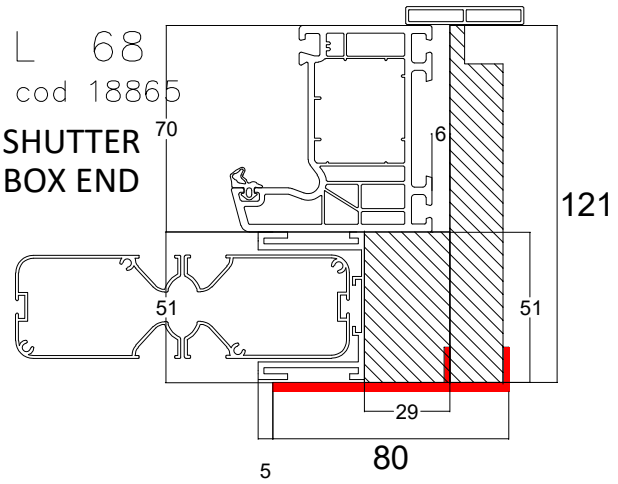


L 68
cod 18865
SHUTTER BOX END

CT 70 JOINT FOR FAUX WOOD ALUMINIUM FRAMES WITH LATERAL SILENT MOSQUITO SCREEN


Z 38
cod 18899
CLOSURE END

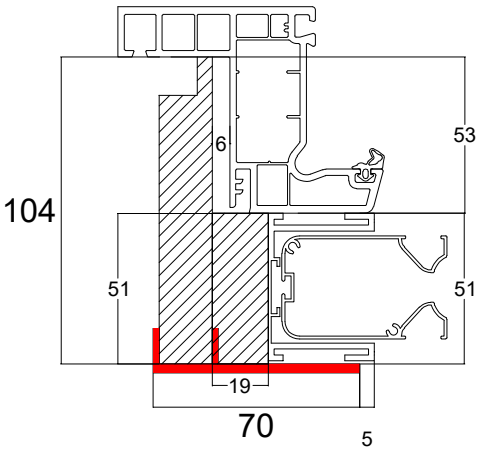


Z 38
cod 18899
SHUTTER BOX END

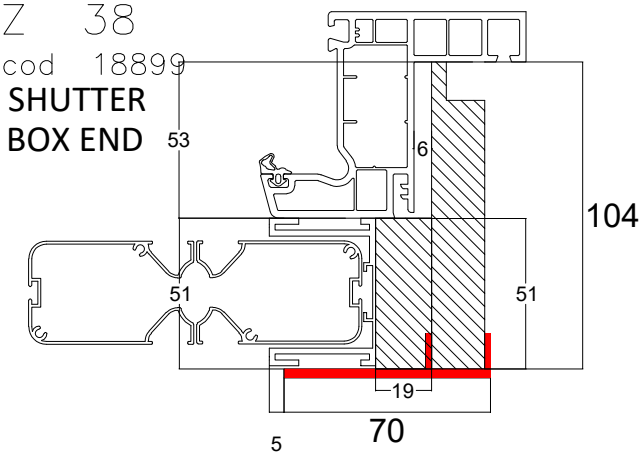


Z 50
cod 19703
CLOSURE END

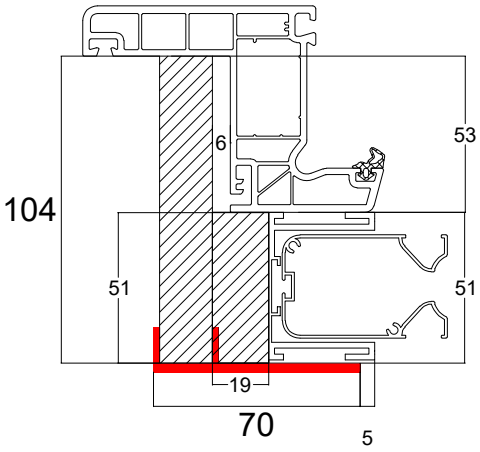


Z 50
cod 19703
SHUTTER BOX END

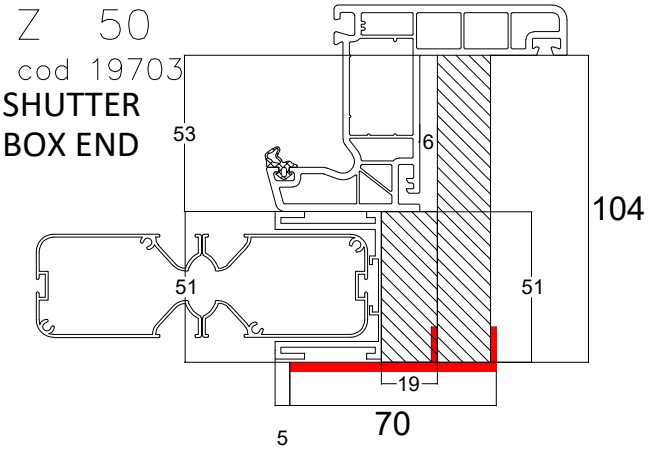


CT 70 JOINT FOR FAUX WOOD ALUMINIUM FRAMES WITH VERTICAL PERFECTA MOSQUITO SCREEN

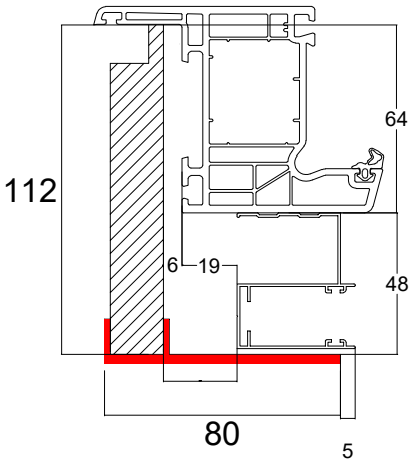


Z 30
cod 19021

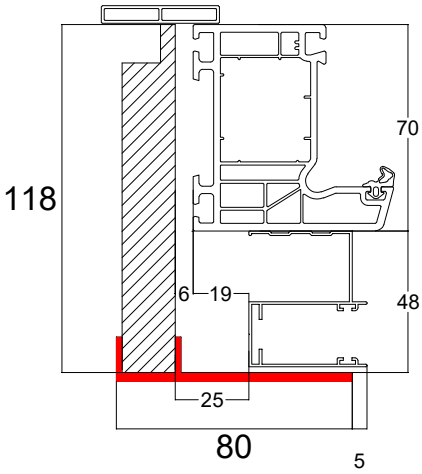

L 68
cod 18865

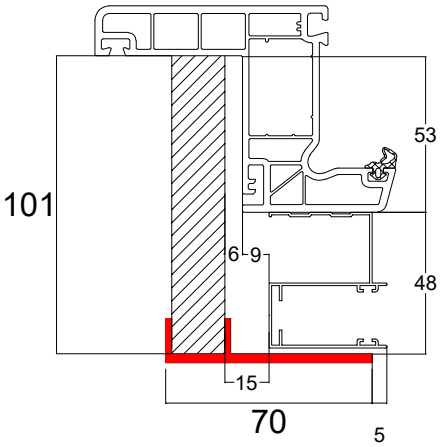


Z 50
cod 19703

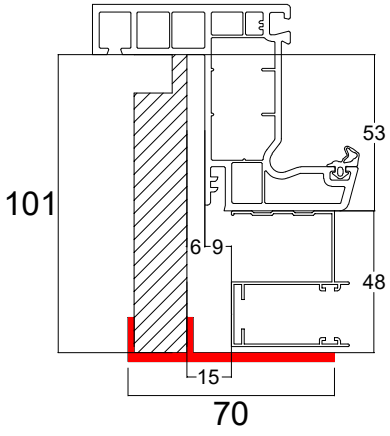


Z 38
cod 18899


CT 70 JOINT FOR FAUX WOOD ALUMINIUM FRAMES WITH LATERAL ROLLFLEX MOSQUITO SCREEN

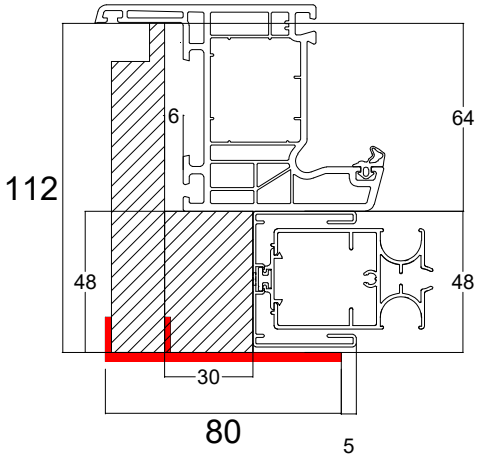

Z 30
cod 19021
CLOSURE END


Z 30
cod 19021
SHUTTER BOX END

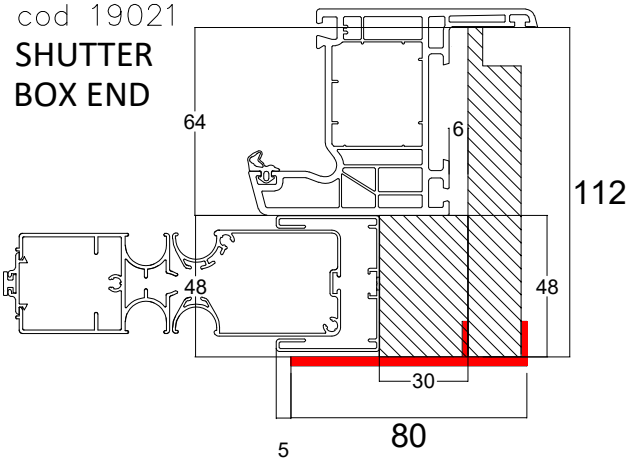

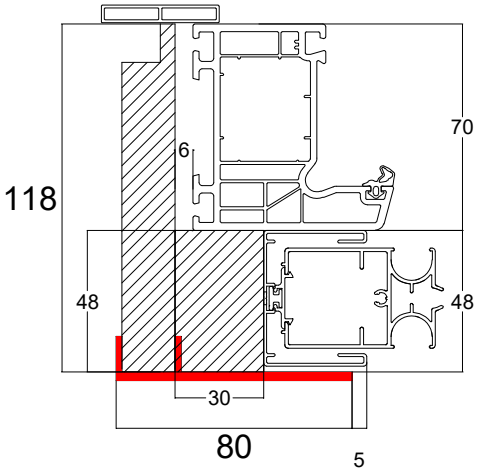


L 68
cod 18865
CLOSURE END

L 68
cod 18865
SHUTTER BOX END

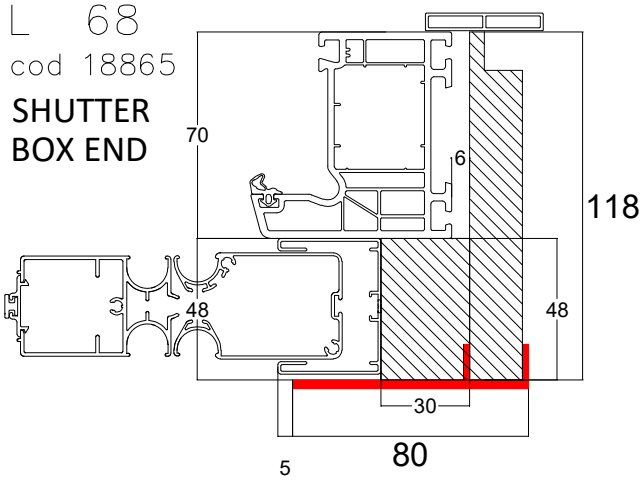


CT 70 JOINT FOR FAUX WOOD ALUMINIUM FRAMES WITH LATERAL ROLLFLEX MOSQUITO SCREEN


Z 50
cod 19703
CLOSURE END

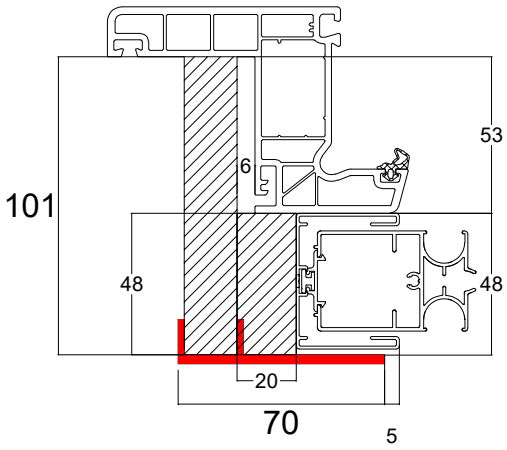


Z 50
cod 19703
SHUTTER BOX END

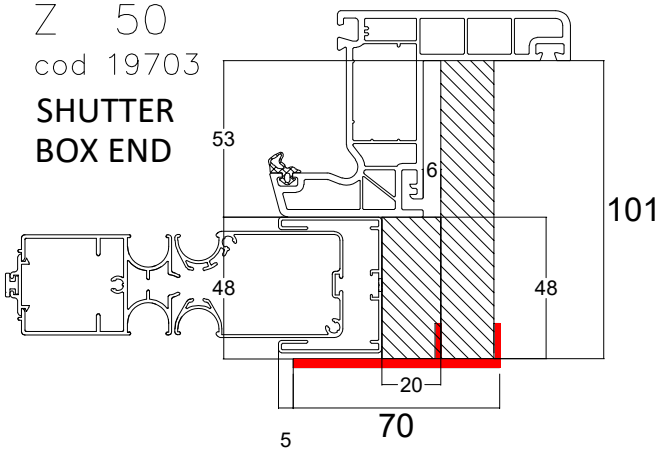

Z 38
cod 18899
CLOSURE END

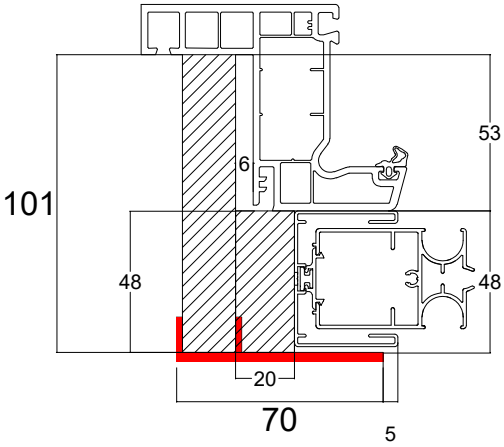


Z 38
cod 18899
SHUTTER BOX END

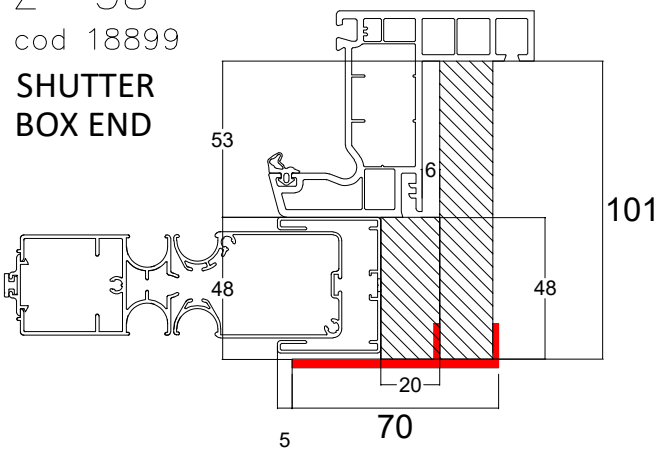


LIVING 82 JOINT FOR FAUX WOOD ALUMINIUM FRAMES


L 70 MD
cod 19411

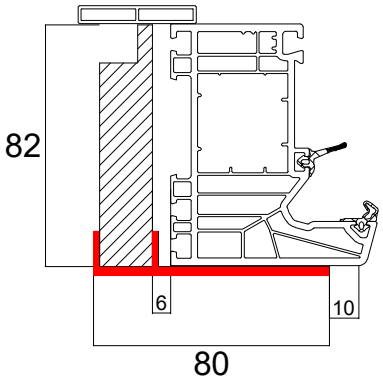


Z 50 MD
cod 19415

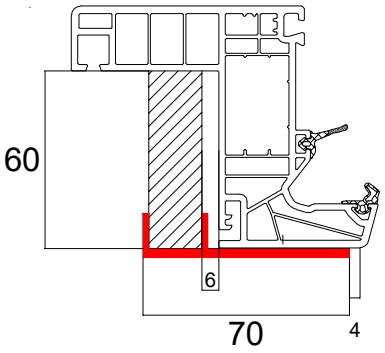

LIVING 82 JOINT FOR FAUX WOOD ALUMINIUM FRAMES WITH VERTICAL COLIBRI MOSQUITO SCREEN

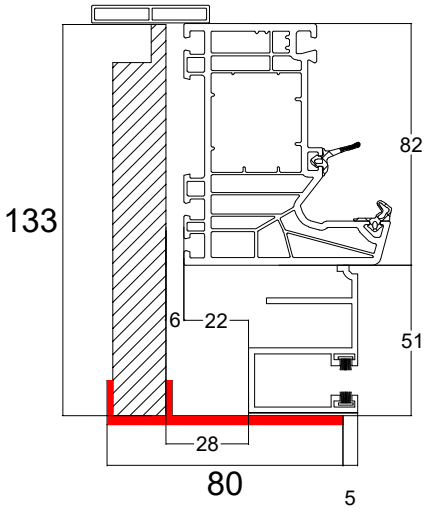


L 70 MD
cod 19411

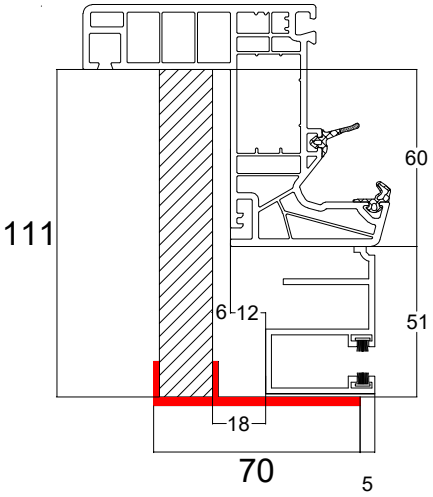


Z 50 MD
cod 19415

LIVING 82 JOINT FOR FAUX WOOD ALUMINIUM FRAMES WITH VERTICAL PERFECTA MOSQUITO SCREEN

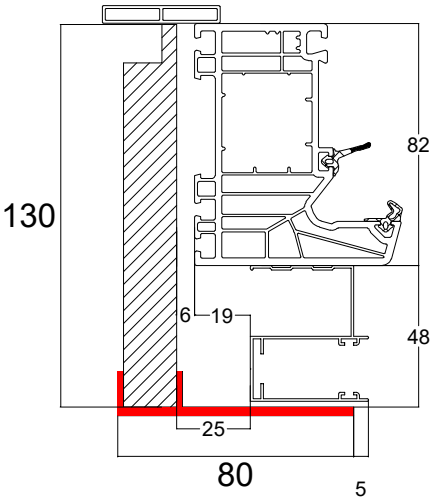


L 70 MD
cod 19411

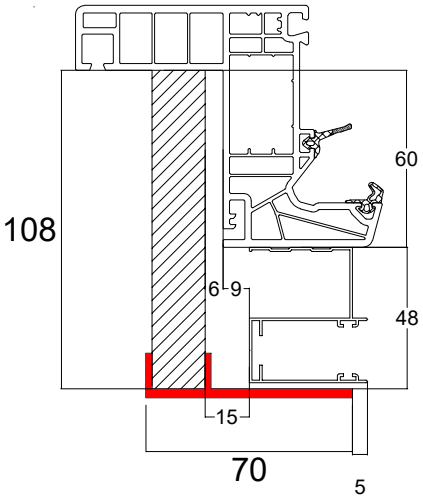


Z 50 MD
cod 19415


LIVING 82 JOINT FOR FAUX WOOD ALUMINIUM FRAMES WITH LATERAL ROLLFLEX MOSQUITO SCREEN

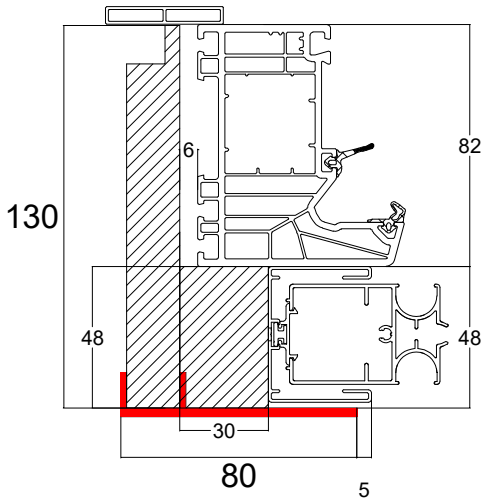


Z 50
cod 19703
CLOSURE END

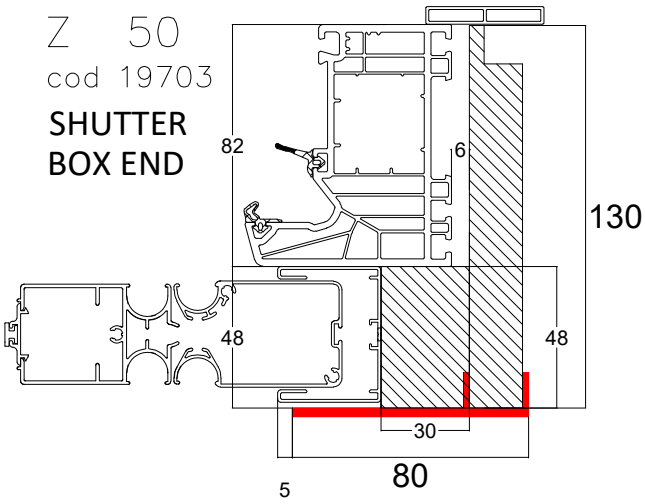

Z 50
cod 19703
SHUTTER BOX END

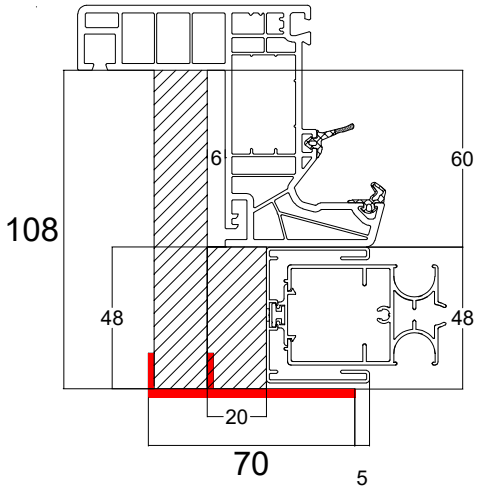


Z 50 MD
cod 19415
CLOSURE END

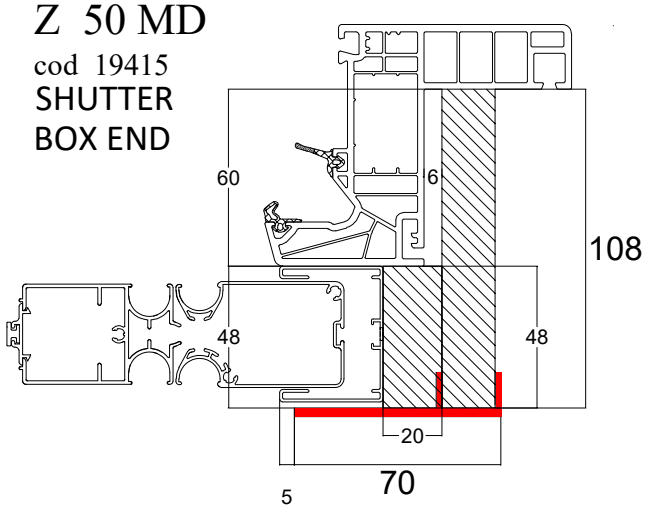


Z 50 MD
cod 19415
SHUTTER BOX END


LIVING 82 JOINT FOR FAUX WOOD ALUMINIUM FRAMES WITH LATERAL SILENT

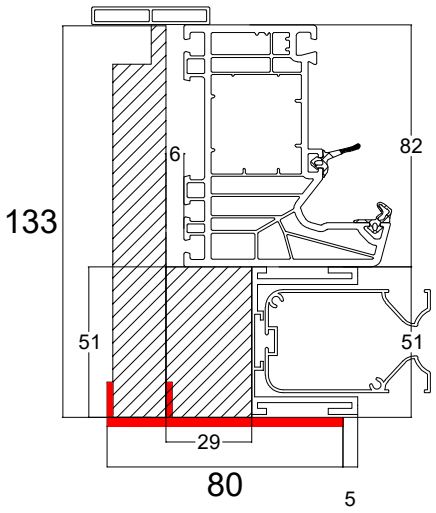

L 70 MD
cod 19411
CLOSURE END

L 70 MD
cod 19411
SHUTTER BOX END

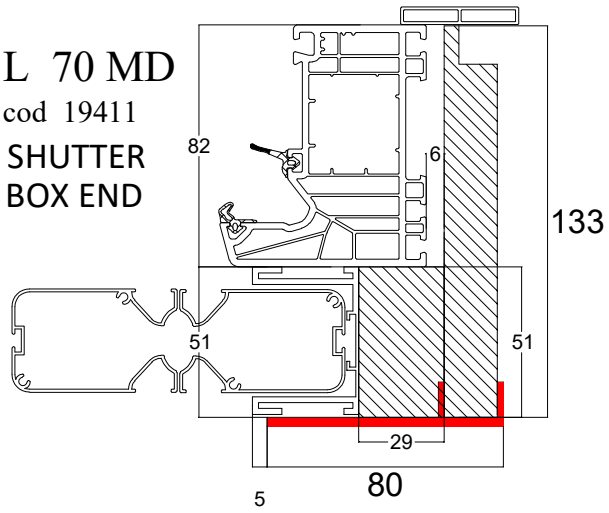

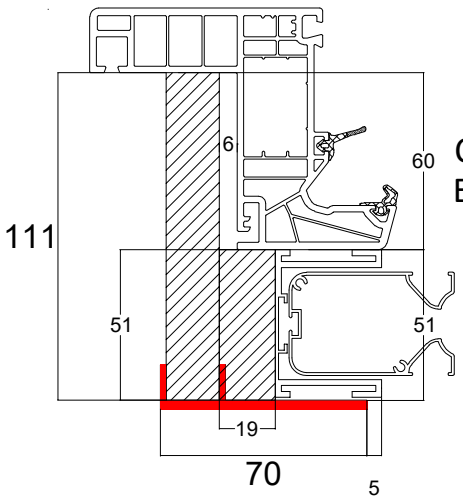

Z 50 MD
cod 19415
CLOSURE END

Z 50 MD
cod 19415
SHUTTER BOX END

